

536,345



(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 484 983 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
11.09.1996 Bulletin 1996/37

(51) Int. Cl.<sup>6</sup>: B41J 2/045, B41J 2/135

(21) Application number: 91119164.1

(22) Date of filing: 11.11.1991

## (54) Ink-jet recording head and its use

Tintenstrahlauzeichnungskopf und dessen Gebrauch

Tête d'enregistrement à jet d'encre et son utilisation

(84) Designated Contracting States:  
DE FR GB IT NL SE

(30) Priority: 09.11.1990 JP 305076/90  
18.03.1991 JP 52086/91  
02.08.1991 JP 194061/91

(43) Date of publication of application:  
13.05.1992 Bulletin 1992/20

(73) Proprietor: SEIKO EPSON CORPORATION  
Shinjuku-ku Tokyo (JP)

(72) Inventors:  
• Narita, Toshio  
Suwa-shi, Nagano (JP)

- Sakai, Shinri  
Suwa-shi, Nagano (JP)
- Hoshino, Masaru  
Suwa-shi, Nagano (JP)
- Tatsuzawa, Yoshiko  
Suwa-shi, Nagano (JP)

(74) Representative: Diehl, Hermann O. Th., Dr. et al  
Diehl, Glaeser, Hohl & Partner  
Patentanwälte  
Postfach 19 03 65  
80603 München (DE)

(56) References cited:  
EP-A- 0 116 971 EP-A- 0 278 590  
EP-A- 0 372 521 DE-A- 3 820 082

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 484 983 B1

BEST AVAILABLE COPY

## Description

An ink-jet printer that squirts drops of ink to print letters and graphics in a dot-matrix format uses a recording head that causes the pressure in the ink cavity to vary by means of a piezoelectric device which produces mechanical deformation upon application of a drive signal. As typically described in U.S. Patent No. 3,946,398, part of the pressure compartment in this recording head is formed of a diaphragm, to which a piezoelectric substrate shaped in a thin sheet form is attached.

The ink-jet recording head described in the above mentioned U.S.P. '398 is operated in such a way that when a drive signal is applied to the piezoelectric device, the ink cavity contracts, whereupon ink is squirted in drops from the nozzle orifice communicating with the ink cavity to form dots on recording paper. Since the piezoelectric device in sheet form is attached to the diaphragm, the pressure compartment must be made large enough to facilitate the operation of attachment. On the other hand, a plurality of nozzle orifices are spaced at very small intervals in order to improve the print quality. Therefore, the pressure compartment and the nozzles must be connected by fluid passage-ways but this only results in a complicated mechanism.

In order to solve those problems, an improved ink-jet printing head has been proposed in, for example, U.S. Patent 4,072,959, and in this printing head a piezoelectric vibrator is positioned in such a way that its tip faces the orifice of each nozzle, with a dynamic pressure being imparted to ink by displacements of the piezoelectric device so that drops of the ink will be squirted from the nozzles. This proposal has the advantage that the fluid passage-ways connecting the pressure compartment and the nozzles are eliminated to achieve structural simplicity. On the other hand, there is a large acoustic impedance mismatch between the piezoelectric vibrator and ink, so the energy produced by the piezoelectric device is not effectively used in drop generation.

In order to solve this problem, EP-A-278590 proposed an ink-jet recording head in which a plurality of passage-ways are formed in one surface of a piezoelectric substrate in a pattern that matches the dot forming region whereas an electrode is provided on the inner surfaces of each passage-way, so that deformation in a shear mode is produced in the walls of the passage-ways to change the capacities of the grooves.

In this recording head, the ink in passage-ways can be directly compressed, so the passage-ways for communicating the ink cavities with the nozzle orifices are eliminated to achieve structural simplicity. Furthermore, the direct compression of the ink cavities offers the advantage of highly efficient drop generation. On the other hand, "nozzle plates" for forming nozzle orifices that insure stable jet of ink drops must be fixed with an adhesive to the piezoelectric substrate. Then, the area of bond is directly subjected to the expanding and contracting motions of the piezoelectric substrate and this

lowers the strength of bonding between the two members. In addition, it is necessary to apply the adhesive to very small areas but this only increases the complexity of the manufacturing process. As a further problem, a step will be formed unavoidably between a groove and the attached nozzle plate and it is difficult to remove air bubbles that are drawn into the groove from the nozzle orifice due to the advancing and retracting motion of the meniscus formed at the nozzle orifice.

It is therefore an object of the invention to provide an improved ink jet recording head and the use of same. This invention therefore provides an ink jet recording head according to independent claims 1, 4, 6, and 9 and its application according to claims 16 and 17.

Further advantageous features, aspects and details of the invention are evident from the dependent claims, the description and drawings. The claims are intended to be understood as a first non-limiting approach of defining the invention in general terms.

The invention provides an ink jet recording head with which the ink in an ink cavity is squirted in drops by the kinetic energy of a piezoelectric vibrator to form dots on recording paper.

The present invention has been achieved under the above mentioned circumstances and has as an aspect providing a novel ink-jet recording head that can be produced by a simple process without mounting nozzle plates and that is capable of forming dots in a consistent manner.

A preferred ink-jet recording head comprises a plurality of piezoelectric substrates that are polarized in the direction of their thickness and that have grooves space by diaphragms at a predetermined pitch and electrodes that are formed in those grooves in an electrically isolated manner, each of said grooves comprising a portion having a sufficient depth to form an ink reservoir, a portion communicating with one side of the head and having a sufficient depth to provide an orifice that is adapted to squirt ink drops, and a portion having a depth appropriate for receiving an externally supplied ink, said piezoelectric substrates being fixed together into a unitary assembly in such a way that the surfaces of the substrates where those grooves are open are in registry and that the directions of polarization in those substrates are opposite to each other, said recording head further including an ink supply means that is provided on the side opposite to the side where said orifice is to be provided.

Fig. 1 is a perspective view of an ink-jet recording head according to a first embodiment of the present invention;

Fig. 2 is a perspective view showing an example of a centrally positioned piezoelectric substrate;

Fig. 3 is a cross-sectional view showing the shape of grooves formed in the center piezoelectric substrate;

Fig. 4 is a perspective view showing how electrodes are provided on the center piezoelectric substrate;

Fig. 5 is a diagram showing the electrode structure of the center piezoelectric substrate;

Fig. 6 is a perspective view showing the structure of a piezoelectric substrate to be used in pair with the center piezoelectric substrate;

Fig. 7 is diagram showing a sectional structure of a groove formed in the substrate of Fig. 6;

Fig. 8 is a diagram showing the electrode structure of that piezoelectric substrate;

Fig. 9 is a perspective view showing the structure of the other piezoelectric substrate to be used in pair with the center piezoelectric substrate;

Fig. 10 is a diagram showing sectional structure of a groove formed in the substrate of Fig. 9;

Fig. 11 is a diagram showing the electrode structure of that piezoelectric substrate;

Figs. 12A to 12D are diagrams showing the step of forming grooves in a piezoelectric substrate and the steps of forming electrodes on the substrate;

Fig. 13 is a cross-sectional view showing in detail the structure of the ink-jet recording head according to the first embodiment of the present invention;

Fig. 14 is a diagram of said recording head as seen from the side from which drops of ink are squirted;

Fig. 15 is a diagram showing a method of driving the ink-jet recording head of the present invention;

Fig. 16 is a diagram showing how diaphragms are deformed during ejection of ink drops;

Fig. 17 is a diagram showing another method of driving the ink-jet recording head of the present invention;

Figs. 18A and 18B are perspective views showing another example of the electrode structure to be used;

Fig. 19 is illustrating a method that is suitable for driving a recording head that has the electrode structure shown in Fig. 18;

Fig. 20A shows a section of another example of the electrode structure to be used;

Fig. 20B is a diagram showing the same electrode structure as seen from the side where the grooves are open;

Figs. 21A and 21B are diagrams showing two other examples of the electrode structure as seen from the side where the grooves are open;

Fig. 22A shows a section of another example of grooves formed in a piezoelectric substrate;

Fig. 22B is a top view of the same example as seen from the side where the grooves are open;

Fig. 23 shows the state of a pressure wave to be exerted upon ink when the electrode structures and grooves shown in Figs. 18 - 22 are adopted, as well as the shape of an ink drop that is generated by said pressure wave;

Fig. 24 shows the state of a pressure wave to be exerted upon ink when none of the approaches shown in Figs. 18-22 are taken, as well as the shape of inks drops that are generated by said pressure wave;

Fig. 25 is a perspective view of an ink-jet recording head according to a second embodiment of the present invention;

Fig. 26 is a perspective view showing the structure of the piezoelectric substrate used in the ink-jet recording head shown in Fig. 25;

Fig. 27 is a cross-sectional view showing the shape of grooves formed in the piezoelectric substrate;

Figs. 28A to 28C are diagrams showing a process of forming grooves in the piezoelectric substrate;

Fig. 29 is a diagram showing a sectional structure of the device shown in Fig. 25;

Fig. 30 is a cross-sectional view showing and ink-jet recording head according to a third embodiment of the present invention;

Fig. 31 is a perspective view showing an example of the top cover member used in the printing head of Fig. 30;

Fig. 32 is a front view showing the structure of said recording head as seen from the side where nozzle orifices are open;

Fig. 33 is a cross-sectional view showing the structure of grooves formed in the piezoelectric substrates of an ink-jet recording head according to a fourth embodiment of the present invention;

Fig. 34 is a cross-sectional view showing the relative positions of piezoelectric substrates and covers, as well as the structure of grooves formed in said piezoelectric substrates in the case where dual nozzle rows are provided in the second, third and fourth embodiments of the present invention; and

Fig. 35 shows a printer in which an ink-jet recording head according to the present invention is employed.

Fig. 1 shows an ink-jet recording head according to a first embodiment of the present invention. Reference numeral 1 represents a central positioned piezoelectric substrate (hereunder referred to as "a center substrate") that is made of lead zirconate or some other material that exhibits a piezoelectric phenomenon. This center substrate has such a thickness that grooves 3 and 4 to be described below can be formed in top and bottom surfaces, respectively, and it is polarized in the direction of its thickness. The top surface of the center substrate has grooves 3 formed therein in such a way that they are spaced by equal distances as shown in Fig. 2; similarly, the bottom surface of the center substrate has grooves 4 formed therein that are also spaced by equal distances. The grooves 3 and 4 serve as fluid passageways. The grooves 3 in the top surface are separated by diaphragms 5 that are made of the same piezoelectric material, and the grooves 4 in the bottom surface are separated by diaphragms 6 that are also made of the same piezoelectric material. The grooves 3 are positioned in such a way that they are offset from the grooves 4 by one half of the pitch between adjacent grooves. The grooves 3 and 4 communicate at one end with one side 1a of the center substrate 1 in such a way

as to form nozzle orifices 50 and 51, whereas the other end of each groove communicates with an ink supply member 10. The surfaces of the rear end of the center substrate 1 are provided with wiring patterns 13 by which electrodes 17 formed continuously on the inner (wall and bottom) surfaces of the grooves 3 and 4 are connected to cables 12 that are connected to a drive circuit (not shown).

As shown in Fig. 3, the each front end 3a and 4a of each groove 3 and 4 that serves as a nozzle orifice is shallow enough to provide an orifice size that is suitable for squirting ink drops; the each center portion 3b and 4b is deep enough to provide a capacity that is capable of accommodating the necessary amount of ink for drop generation; and the each rear end of 3c and 4c of each groove is formed at such a depth that it will have a suitable fluid resistance in cooperation with the inlet port 10a of the ink supply member 10.

As shown in Figs. 4 and 5, the each inner (wall and bottom) surfaces of grooves 3 and 4 and adjacent diaphragms 5 and 6 are covered with a metal layer that is electrically separated by blank portions 15 and 16 to form electrodes 17 and 18 so as to permit the reception of a drive signal from a drive circuit.

In Fig. 1, reference numeral 20 is an upper substrate that is made of the same material as the center substrate that exhibits a piezoelectric phenomenon. As shown in Fig. 6, grooves 21 are formed on the surface of the upper substrate so as to face with the grooves 3 formed on the upper surface of the center substrate 1. As shown in Fig. 7, each of the grooves 21 is formed in such a way that the front end 21a which provides a nozzle orifice is shallow, that the portion 21b providing an ink cavity is deep and that the rear end 21c will communicate with the inlet port 10a of the ink supply member 10. The each of grooves 21 are separated by diaphragms 22 and their inner (wall and bottom) surfaces are covered with a metal layer that is electrically separated by blank portions 23 to form electrodes 24. The electrodes 24 are such that when the upper substrate 20 is placed on top of the center substrate 1, they will establish electrical connection with the electrodes 17 on the center substrate 1.

In Fig. 1, reference numeral 30 is a lower substrate that is made of the same material as the center substrate 1 that exhibits a piezoelectric phenomenon. As shown in Fig. 9, grooves 31 are formed on the surface of the lower substrate so as to face with the grooves 4 formed in the bottom surface of the center substrate 1. As shown in Fig. 10, each of the grooves 31 is formed in such a way that the front end 31a which provides a nozzle orifice is shallow, that the portion 31b providing an ink cavity is deep and that the rear end 31c will communicate with the inlet port 10a of the ink supply member 10. The grooves 31 are separated by diaphragms 32 and their inner (wall and bottom) surfaces are covered with a metal layer that is electrically interrupted by blank portions 33 to form electrodes 34. The electrodes 34 are such that when the lower substrate 30 is combined

with the center substrate 1, they will establish electrical connection with the electrodes 18 on the center substrate 1.

Fig. 12 illustrates an example of a method of working the center substrate 1, the upper substrate 20 and the lower substrate 30. First, a wedge stand 41 having a predetermined angle, e.g. 2 degrees, is fixed on a horizontal work table 40. Then, a piezoelectric substrate 42 of a predetermined thickness is fixed on the wedge 41. With the workpiece set up in the manner described above, a dicing saw 43 is positioned in such a way that its cutting depth at the front end of the substrate which provides a nozzle orifice will take on a value appropriate for the nozzle orifice, e.g. 30  $\mu\text{m}$ . Thereafter, the dicing saw 43 or the work table 40 is moved relatively by a given distance for cutting the surface of the substrate. As a result, a groove having a predetermined width, e.g. 90  $\mu\text{m}$ , that corresponds to the cutting width of the dicing saw will be formed at the angle specified by the wedge 41. After the cutting of a predetermined length is completed, the table 40 or the dicing saw 43 is further moved in the horizontal direction and the saw is slowly raised up, whereby the shaping of a rear end of the groove is carried out (see Fig. 12A).

When the formation of a single groove is carried out, the work table 40 or the dicing saw 43 is shifted laterally by a predetermined distance, e.g. 170  $\mu\text{m}$ , and the above-described procedure is repeated to form the necessary number of grooves.

After forming grooves 44 on the surface of the piezoelectric substrates, a nickel layer 45 is formed in a predetermined thickness, e.g. 1  $\mu\text{m}$  on the cut surface of each substrate by a suitable technique such as electroless plating, sputtering or evaporation (see Fig. 12B). The surface of the nickel layer is coated with a corrosion-resistant metal, e.g. gold (Au) layer 46 in a predetermined thickness, e.g. 0.1  $\mu\text{m}$  (see Fig. 12C).

Subsequently, the metal layers 45 and 46 formed on the diaphragms are either cut with a dicing saw 47 or etched by photolithography in a direction parallel to the fluid passageways so as to electrically isolate the plated layers on the individual passage-ways (Fig. 12D).

The substrates thus formed are assembled together in the following manner. The upper substrate 20 and the lower substrate 30 are fixed to the top and bottom surfaces of the center substrate 1 by a suitable means such as an adhesive in such a way that the grooves 21 and 31 will be fit with the grooves 3 and 4, respectively. In addition, an ink supply member 10 that is positioned at the rear end of each of the upper and lower substrates 20 and 30 is fixed to the center substrate in such a way that the ink supply port 10a will communicate with the ends 3a and 4a of the grooves 3 and 4, respectively, in the center substrate 1.

As a result, the upper and lower substrates 20 and 30 are positioned and fixed in such a way that the directions of their polarization  $E_2$  and  $E_3$  that are opposite to the direction of polarization  $E_1$  in the center substrate 1 across their interfaces with the latter, as shown in Fig.

13. The grooves formed in the respective substrates 1, 20 and 30 are such that their shallow portions 3a/21a and 4a/31a at the front end provide nozzle orifices 50 and 51 as shown in Fig. 14 and, at the same time, those grooves form ink cavities in the central portion that have a cross section shaped like a flattened water drop. The electrodes 24 on the upper substrate 20 and the electrodes 34 on the lower substrate 30 contact to the electrodes 17 and 18 on the opposite surfaces of the center substrate 1, respectively, to establish electrical connection.

Fig. 15 show a method of driving the ink-jet recording head having the construction described above. As shown, the electrodes 24 and 17 formed on the upper substrate 20 and the center substrate 1, respectively, are connected to a drive power supply 68 via three-state drive circuits 61 - 67 that are to be controlled by a signal from a print data output circuit 60. If a selected ink cavity 70 that corresponds to the position where dots are to be formed is supplied with a voltage of one polarity, e.g. negative, whereas the electrodes for two ink cavities 71 and 72 adjacent to ink cavity 70 are supplied with a voltage of the other polarity, e.g. positive (see Fig. 16), the diaphragms 73 and 74 on the center substrate 1 as well as the diaphragms 75 and 76 on the upper substrate 20 which define the ink cavity 70 in combination with 73 and 74 are subjected to the action of electric fields F1 and F2 that are directed towards the ink cavity 70. As a result, the diaphragms 73, 74, 75 and 76 will deflect in a shear mode towards, the ink cavity 70, which then shrinks in capacity to compress the ink it contains. This causes the ink in the cavity 70 to be squirted in drops from the tapered orifice (Fig. 13). The orifice 50 has a smaller cross-sectional area than the ink cavity 70, so it will act like a nozzle orifice and permits the ink in the cavity to be squirted in drops of an optimal diameter to jet until they reach a recording sheet and form dots on its surface.

When the dot generation ends and no more drive signal is applied, the deformed diaphragms 73 - 76 will be restored to their initial state. In this process of restoration, the ink cavity will expand, so that additional ink is supplied into the ink cavity 70 through the inlet port 10a to condition the head for the next cycle of dot generation.

In the first embodiment of the present invention, ink is ejected by abruptly deforming the cavity defining diaphragms as ink is flowing into the cavity. Alternatively, electric fields  $F_3$  and  $F_4$  that will change their strength at small rate may be first applied as shown in Fig. 17 in directions that expand the ink cavities 71 and 72 adjacent the cavity 70, whereupon the diaphragms 75 and 76 on the upper substrate 20 and the diaphragms 73 and 74 on the center substrate 1 are deformed at a relatively slow speed to fill the cavity 70 with ink. Following this preliminary step, the diaphragms 73 - 76 are abruptly deformed as in Fig. 16 to eject ink drops. That is, the ink cavity 70 is filled with the necessary amount of ink, and the elastic energy stored in the diaphragms

73 - 76 is effectively used to generate ink drops with high efficiency.

Further, in the first embodiment described above, grooves are formed in both surfaces of the center substrate 1 so as to provide nozzle orifices in two rows. If desired, grooves may be formed in only one surface of the center substrate 1 while other grooves are formed in the corresponding surface of either the upper or lower substrate to provide nozzle orifices in one row. It will be apparent to one skilled in the art that the same result can be achieved by this modified arrangement.

Figs. 18A and 18B are diagrams showing another example of the structure of piezoelectric substrates to be used in making the ink-jet recording head of the present invention. In Fig. 18, reference numeral 80 is a piezoelectric substrate that is made of lead zirconate or some other material that exhibits a piezoelectric phenomenon. The piezoelectric substrate is polarized in the direction of its thickness and has grooves 81 formed in its surface at equal spacings to provide fluid passageways. The grooves 81 are separated by diaphragms 82 that are made of the same piezoelectric material. One end of each groove 81 communicates with one side 80a of the substrate 80 so as to form a nozzle orifice whereas the other end communicates with the ink supply port.

As in the embodiment already described above, the grooves 81 are formed in such a way that the front end of each groove which serves as a nozzle orifice is shallow enough to provide an orifice size that is suitable for squirting ink drops, that the center portion is deep enough to provide a capacity that is capable of accommodating the necessary amount of ink for drop generation, and that the rear end is of such a depth that it will have a suitable fluid resistance in cooperation with the inlet port of the ink supply member. Further, the inner (wall and bottom) surfaces of groove 81 are provided with electrodes 84 and 85 each of which is divided longitudinally into two parts by a blank space 83. The electrodes 84 and 85 are so adapted as to be connected to an external circuit by means of conductive patterns 86 and 87.

A substrate 90 which makes a pair with the substrate 80 (see Fig. 18B) is made of the same piezoelectric material and that has grooves 91 and electrodes 94 and 95 formed on its surface in such a way that they are symmetrical with the grooves 81 and electrodes 84 and 85 so as to place with each other. Stated more specifically, grooves 91 are formed in the surface of the substrate 90 at equal spacings to provide fluid passageways and those grooves 91 are separated by diaphragms 92 that are made of the material as the substrate 90. One end of each groove 91 communicates with one side 90a of the substrate 90 so as to form a nozzle orifice whereas the other end communicates with the ink supply port. As in the embodiment already described above, the grooves 91 are formed in such a way that the front end of each groove which serves as a nozzle orifice is shallow enough to provide an orifice

size that is suitable for squirting ink drops, that the center portion is deep enough to provide a capacity that is capable of accommodating the necessary amount of ink for drop generation, and that the rear end is of such a depth that it will have a suitable fluid resistance in cooperation with the inlet port the ink supply member. Further, the inner (wall and bottom) surfaces of grooves 91 are provided with electrodes 94 and 95 each of which is divided longitudinally into two parts by a blank space 93. The electrodes 94 and 95 are so adapted as to be connected to an external circuit by means of conductive patterns 96 and 97.

When the two piezoelectric substrates 80 and 90 are bonded or otherwise connected, with their cut surfaces facing each other, they will have polarization vectors E4 and E5 acting in opposite directions across the interface while, at the same time, the shallow front portions of the grooves in the substrates combine to provide ink cavities that have tapered nozzle orifices and that resemble flattened water drops in cross section. In addition, the two electrodes 84 and 85 for the grooves 81 in the substrate 90 and the two electrodes 94 and 95 on the substrate 90 contact each other to establish electrical connection, with each ink cavity having an electrode that is divided into two parts in the longitudinal direction.

Fig. 19 illustrates a method for driving the printing head having the construction described above. A print data output circuit 100 supplies a control signal to a three-state drive circuit 101 whose output is supplied directly to the electrodes 85 and 95 closer to an ink supply port 103 where the same output is supplied to the electrode 84 and 94 on the nozzle orifice side via a delay circuit 102 that delays the output by the time necessary for a vibration to propagate from the electrodes 85 and 95 to the electrodes 84 and 94.

In the circuitry shown in Fig. 19, a drive signal is first applied to the electrodes 85 and 95 closer to the ink supply port 103, so that only the regions of electrodes 85 and 95 of the diaphragms 82 and 92 are deformed towards an ink cavity, whereupon the ink in the cavity is compressed to create an elastic wave. When the time set in the delay circuit 102 (e.g. 20 microseconds if the distance between the centers of two electrode segments is 20 mm) has passed, the elastic wave from the electrodes 85 and 95 reaches the electrodes 84 and 94, whereupon the delay circuit 102 outputs a drive signal that is applied to the electrodes 84 and 94. As a result, the regions of the electrodes 84 and 94 of the diaphragms 82 and 92 are deformed to further compress the ink, thereby producing an elastic wave that is superposed on the elastic wave generated by the electrodes 85 and 95. This allows the ink flowing towards the nozzle orifice to be compressed with high efficiency and within a short region, whereby a sharp pressure wave is exerted at the nozzle orifice to have the ink squirted in drops without any tailing.

In the foregoing discussion, each of the electrodes for grooves is divided into two parts in the longitudinal

direction but if necessary it may be divided into three or more parts in the longitudinal direction so that a drive signal is applied to the successive electrode segments with a time lag being provided that corresponds to the time required for the pressure wave generated at the ink supply port to reach the respective electrode segments. It will be apparent to one skilled in the art that the same result can be attained by this modified arrangement.

Figs. 20A and 20B show another example of the electrode structure to be used in the ink-jet recording head of the present invention. Reference numeral 110 is a piezoelectric substrate which, as in the embodiment already described above, has grooves 111 formed in its surface that communicate with one end 110a of the substrate to form nozzle orifices. The inner (wall and bottom) surfaces of grooves 111 are provided with electrodes 112 for allowing an electric field to act on diaphragms with which the grooves are separated. Each electrode 112 consists of two regions, one being region 112a that is closer to the distal end 110a of the substrate where a nozzle orifice opens and the other being region 112b that is closer to the ink supply port, and the second region 112b is formed to be thicker than the first region 112a. Needless to say, such electrodes that vary in thickness in different regions can be easily formed by controlling the time of evaporation or plating.

With the electrode structure described above, the elasticity of diaphragms that are closer to the ink supply port can be enhanced by metals that have a higher elastic modulus than the piezoelectric substrate, so those diaphragms will deform faster than the diaphragms that are closer to the nozzle orifice. At the time when the pressure wave of the ink that has been generated by the deformation of those diaphragms reaches the nozzle orifice, the diaphragms in that region are still in the process of deformation, so the pressure wave propagating from the ink supply port will be further compressed to insure that a pressure wave that is as sharp as is produced in the previous embodiment will act on the nozzle orifice to have the ink squirted in drops without tailings.

In the case described above, the thickness of the metal layer forming the electrodes is adjusted to vary at two levels along the grooves. Two other examples of the electrode structure are shown in Figs. 21A and 21B; the electrode 122 shown in Fig. 21A consists of three portions, 122a, 122b and 122c, that are formed in such a way that the thickness increases stepwise in the order written along a groove 121 in a piezoelectric substrate 120; and the electrode 123 shown in Fig. 21B is formed in such a way that its thickness increases monotonically towards the ink supply port. It will be apparent to one skilled in the art that the same result can be attained by those modifications.

Fig. 22 shows the structure of another example of grooves that are to be formed in a piezoelectric substrate and that are effective for the purpose of concentrating a pressure wave. Reference numeral 130 is a groove that is formed in the surface of a piezoelectric substrate 131 and that consists of a deep region 130a

closer to a nozzle orifice and a shallow region 130b closer to the ink supply port, the depth of which portion is in no way detrimental to the generation of ink drops. An electrode 132 is formed on the inner (wall and bottom) surfaces of those regions. A diaphragm 133 that separates two adjacent grooves 130 and that will deform in response to a drive signal applied to the electrode 132 is such that the height H1 of the region closer to the ink supply port is smaller than the height H2 of the region closer to the nozzle orifice and, therefore, the region closer to the ink supply port has a higher elastic modulus on account of the constraint exerted by the bottom surface. Thus, upon application of a drive signal to the electrode, the region of the diaphragm closer to the ink supply port will first deform and the region closer to the nozzle orifice which has a lower elastic modulus will subsequently deform. As a result, the diaphragm in the region closer to the nozzle orifice deforms to create a pressure wave that is superposed on the pressure wave that has propagated from the region closer to the ink supply port. Hence, a pressure wave that is as sharp as is produced in the previous embodiment will act on the nozzle orifice.

In the examples shown in Figs. 19 - 22, the pressure wave that has been generated on the ink supply port side (see Fig. 23A) will reach the nozzle orifice after the lapse of time  $\Delta T$  (Fig. 23B), causing the diaphragm in that region to deform. Hence, a pressure wave that has short tails and a high peak value as indicated by a dashed line in Fig. 23B can be propagated to the nozzle orifice. As a result, ink drops having a high ejection rate and a short duration will be generated and squirted onto recording paper with minimum bends and not tailings (see Fig. 23C).

However, in the absence of the arrangements described above, pressure waves are generated simultaneously in all regions from the nozzle orifice to the ink supply port as shown in Fig. 24A and those pressure waves will successively propagate to the nozzle orifice, so that ink will be squirted over a fairly long time as in the case of the fluid from a water pistol. As a result, the generated ink drops will have a small velocity of jetting and continue for a long period (see Fig. 24B), whereby bends and satellites (undesired drops) are produced to lower the print quality.

Fig. 25 shows a second embodiment of the present invention. Reference 140 is a substrate that is made of piezoelectric material such as lead zirconate and it has a selected thickness, e.g. 1 mm, which is greater than one half the depth, e.g. 400  $\mu\text{m}$ , of the deepest portion of a fluid passageway to be described just below. The substrate 140 is preliminarily polarized in the direction of its thickness. Reference numeral 141 is an upper substrate that is made of the same material as the substrate 140 and it has a selected thickness, e.g. 200  $\mu\text{m}$ , which is approximately equal to one half the depth of the deepest portion of the fluid passageway. This substrate is also polarized preliminarily in the direction of its thickness. The two substrates 140 and 141 are fixed

together with an adhesive into a single substrate unit 142 in such a way that the directions of polarization are opposite to each other.

As shown in Fig. 26, the substrate unit 142 has grooves 143 formed in the surface of the less thick upper substrate 141. These grooves have a selected width of e.g. 85  $\mu\text{m}$  and, as shown in Fig. 27, each groove 143 consists of the following three portions: a portion 143a that is formed at an end of the substrate unit 142 and that has a very small depth, e.g. 80  $\mu\text{m}$ , to enable the formation of a nozzle orifices in combination with a top cover 150 that is to be described below; a portion 143b that has a greater depth, e.g. 400  $\mu\text{m}$ , about twice the thickness of the upper substrate 141; and a portion 143c that is formed closer to the other end of the substrate unit 142 and that has a smaller depth, e.g. 100  $\mu\text{m}$ , so that the fluid passageway is interrupted part of the way by an inner surface of the substrate 141. The depth and length of the portion 143c are selected in such a way that it will present a certain fluid resistance in cooperation with the inlet port 151a of an ink supply member 151 (to be described just below), namely, less ink will return during printing whereas the ink will flow in rapidly during ink supply.

The grooves 143 are separated by diaphragms 146 that are made of the same materials as the substrates, and their inner (wall and bottom) surfaces are coated with a metal layer to provide electrodes 147, which are connected to a cable 149 by conductive patterns 148 so as to receive a drive signal from an external drive circuit.

Turning back to Fig. 25, reference numeral 150 is a top cover which is fixed to the substrate unit 142 so as to seal the grooves 143 over the area from the front end 143a to the rear end 143c. Reference numeral 151 is an ink supply member has the inlet port 151a located in a position that communicates with part of the rear end 143c of each groove 143.

Figs. 28A to 28C shows an illustrative method of forming grooves 143 in piezoelectric substrates. Shown by 155 is a substrate unit that is formed by bonding two preliminarily polarized piezoelectric substrates 156 and 157 in such a way that the directions of polarization are opposite to each other. The substrate unit is fixed to a work table, with the thinner substrate 156 facing up to be subjected to cutting. With the unit being thus set up, a dicing saw 160 is set in such a position that it is located in the center of a groove to be formed and cutting is effected to a depth about twice the thickness of the substrate 156 and the saw or the substrate unit 155 is moved relatively to form a groove 161 of a length suitable for an ink cavity (see Fig. 28A).

When the groove 161 that is to provide an ink cavity is thus formed, the dicing saw 160 is raised and moved to the front end of the substrate unit 155, where it is cut to a predetermined depth (see Fig. 28B). Thereafter, the dicing saw 160 is moved the other end of the substrate unit 155 and cutting is effected to form a portion that serves as a connection to the ink supply port 151a. In this case, the cutting depth and length are adjusted in

accordance with the type of ink used and the ink supply pressure.

When the formation of a full length of grooves is finished, a layer of Ni-Cr alloy is formed in a thickness of 2 to 4  $\mu\text{m}$  by a suitable technique such as evaporation, sputtering or electroless plating and this alloy layer is subsequently coated with a gold (Au) layer in a thickness of less than 1  $\mu\text{m}$ . After thus forming a metal layer over the entire surface of the substrate unit including the inner and bottom surfaces of the grooves, the metal layer on top of the diaphragms which define the grooves is removed to electrically isolate the electrodes for individual grooves. Thereafter, conductive paths to be connected to those electrodes are formed by separating the metal layer on the surface of the substrate unit at its rear end in correspondence to the electrode pattern.

Fig. 29 shows a sectional structure of the ink-jet recording head that is constructed in the manner described above. When ink is supplied through the inlet port 151a, it will flow into the grooves 143 from the rear end 143c and continues flowing all the way through the grooves to form a meniscus at the nozzle orifices 145. Then, a voltage of one polarity is applied to the electrode for the groove communicating with the nozzle orifice from which ink drops should be squirted to form dots whereas a voltage of the other polarity is applied to the electrodes for two adjacent grooves. As a result, the diaphragms that define the groove of interest will deform in a shear mode towards the ink cavity so as to reduce its capacity, whereby ink drops will be squirted from the nozzle orifice 145 that is formed by the front end 143a of the groove in the substrate unit and the top cover 150. When the dot formation ends, the application of voltage is ceased, whereupon the diaphragms are restored to the initial state and the capacity of the groove will increase, so that additional ink is supplied from the rear end 143c of the groove to condition the head for the next printing run.

In the example just described above, printing is performed by first contracting the ink cavity in response to a drive signal. It should, however, be noted that as already explained with reference to Fig. 17, printing may be performed by first expanding the ink cavity and then contracting it.

The techniques shown in Figs. 18 - 22 may also be applied to the example under consideration. That is, each electrode may be divided into at least two regions, one being located closer to the nozzle orifice and the other closer to the ink supply port and a drive signal is applied first to the region closer to the ink supply port, with successive drive signals being applied with a time lag that matches the propagation speed of the pressure wave; or electrodes are formed in such a way that their thickness increases stepwise in order from the nozzle orifice side to the ink supply port side; or the elastic modulus of the region closer to the nozzle orifice is made relatively small by, for example, forming grooves that are shallower in the region closer to the ink supply port. It will be apparent to one skilled in the art that by

adopting those techniques, pressure waves that have short tails and high peak values can be produced to generate sharp ink drops without tailings.

Fig. 30 shows a third embodiment of the present invention. Shown by 170 is a substrate that is made of a piezoelectric material such as lead zirconate and it has a selected thickness, e.g. 1 mm which is greater than one half the depth, e.g. 400  $\mu\text{m}$ , of the deepest portion of a fluid passageway to be described just below. The substrate 170 is preliminarily polarized in the direction of its thickness. Shown by 171 is an upper substrate that is made of the same material as the substrate 170 and it has a selected thickness, e.g. 200  $\mu\text{m}$ , which is approximately equal to one half the depth of the deepest portion of the fluid passageway. This substrate is also polarized preliminarily in the direction of its thickness. The two substrates 170 and 171 are fixed together with an adhesive into a single substrate unit in such a way that the directions of polarization are opposite to each other.

The substrates 170 and 171 have grooves 173 of a width of e.g. about 85  $\mu\text{m}$  formed in such a way that they are open at the surface of the less thick upper substrate 171. The grooves 173 are spaced at a constant pitch as already described in the previous embodiments. The grooves 173 are generally boat-shaped in cross section and the depth of their central portion is about 400  $\mu\text{m}$ , which is approximately twice the thickness of the substrate 171. The inner (wall and bottom) surfaces of the grooves 173 are coated with a metal layer to form electrodes 176 as in the previous embodiments.

Shown by 180 in Fig. 30 is a top cover which has grooves 180a formed therein as shown in Fig. 31; the grooves 180a are open at one end and have a length at least sufficient to communicate at the other end with the grooves 173 in the piezoelectric substrate 171. The depth and width of each groove 180a are of a selected size, such as e.g. ca. 80  $\mu\text{m}$ , that is appropriate for forming a nozzle orifice from which ink drops are to be squirted. The grooves 180a are spaced at the same pitch as grooves 173 and they are provided in such a way that they combine with the surface of the substrate 171 to form nozzle orifices 181 (see Fig. 32). Shown by 182 in Fig. 30 is an ink supply member which is fixed to the substrate 171 in such a way that the ink supply port 182a communicates with the rear end of each groove 173.

In the embodiment under consideration, the electrodes 176 for two grooves that are adjacent to the groove communicating with the nozzle orifice from which ink drops should be squirted to form dots are supplied with a drive signal as in the previous embodiments. Then, the diaphragms that define the groove of interest will deform and the ink cavity contracts, whereupon the ink contained in the groove (cavity) is compressed to be squirted in drops from the nozzle orifice 181 which is defined by the groove 180a in the top cover 180 and the surface of the substrate 171.



In the embodiment just described above, printing is performed by first contracting the ink cavity in response to a drive signal. It should, however, be noted that as already explained with reference to Fig. 17, printing may be performed by first expanding the ink cavity and then contracting it.

The techniques shown in Figs. 18 - 22 may also be applied to the embodiment under consideration. That is, each electrode may be divided into at least two regions, one being located closer to the nozzle orifice and the other closer to the ink supply port and a drive signal is applied first to the region closer to the ink supply port, with successive drive signals being applied with a time lag that matches the propagation speed of the pressure wave; or electrodes are formed in such a way that their thickness in creases stepwise in order from the nozzle orifice side to the ink supply port side; or the elastic modulus of the region closer to the nozzle orifice is made relatively small by, for example, forming grooves that are shallower in the region closer to the ink supply port. It will be apparent to one skilled in the art that by adopting those techniques, pressure waves that have short tails and high peak values can be produced to generate sharp ink drops without tailings.

Fig. 33 shows the structure of grooves formed in the piezoelectric substrates of an ink-jet recording head according to a fourth embodiment of the present invention. Shown by 190 is a substrate unit that is composed of two polarized piezoelectric substrates 191 and 192. The substrate 191 has a thickness approximately one half the depth of the deepest portion of the grooves to be formed and the substrate 192 is thicker than the substrate 191. The two substrates are bonded together in such a way that the directions of their polarization are opposite to each other. In those substrates, grooves 193 are formed in such a way that their depth increases monotonically in a linear fashion from the nozzle orifice side towards the ink supply port.

According to the fourth embodiment of the present invention, a groove can be formed by a single cutting operation in which a dicing saw is placed in contact with the side of the substrate unit 190 where nozzle orifices are to be formed and then the saw is moved with the relative distance between the saw and the substrate 190 being reduced in the direction in which the groove is formed.

The foregoing description of the third and fourth embodiments of the present invention shown in Figs. 25 and 30 is directed to the case where nozzle orifices are formed in only one surface of a substrate unit but it should be understood that two rows of nozzle orifices may be formed as shown in Fig. 1. An example of this two-row arrangement is shown in Fig. 34. Piezoelectric substrates 201 and 202 each having a thickness about one half the depth of the grooves to be formed are bonded to the opposite surfaces of a centrally positioned piezoelectric substrate 200. Grooves 203 and 204 are then formed at a predetermined pitch in the surfaces of the substrates 201 and 202, respectively. The

grooves 203 and 204 are provided with electrically isolate electrodes and subsequently sealed with covers 205 and 206, respectively. Finally, ink supply members 207 and 208 are provided on the respective substrates 201 and 202 in such a way that they communicate with the grooves 203 and 204, respectively. This provides a simple process for constructing a recording head that has two rows of nozzle orifices on opposite surfaces.

Fig. 35 shows a printer in which an ink-jet recording head according to the present invention is employed. In this printer, a head carriage 303 mounts an ink jet-recording head to which an ink for printing is supplied from an ink supply pipe 302 and print data are applied through a flexible wiring substrate 306. The head carriage 303 is driven by a carriage motor 307 through a carriage belt 305 so that the head is shuttled along a carriage guide 304 extending in a main scanning direction. Thus, a recording paper 309 on a platen 308 is printed.

## Claims

1. An ink-jet recording head comprising: a plurality of piezoelectric substrates (1, 20, 30, 80, 90) that are polarized in the direction of their thickness and that have grooves (3, 4, 21, 31, 81, 91, 111) spaced by diaphragms (5, 6, 22, 32, 82, 92, 133) at a predetermined pitch; and electrodes (17, 18, 24, 34, 84, 85, 94, 95, 112, 122, 123) that are formed in those grooves in an electrically isolated manner, each of said grooves (3, 4, 21, 31, 81, 91, 111) comprising a portion having a sufficient depth to form an ink reservoir, a portion communicating with one side (1a, 80a, 90a) of the head and having a sufficient depth to provide a nozzle orifice (50, 51) that is adapted to squirt ink drops, and a portion having a depth appropriate for receiving an externally supplied ink,
2. said piezoelectric substrates (1, 20, 30, 80, 90) being fixed together into a unitary assembly in such a way that the surfaces of the substrates where those grooves (3, 21, 4, 31, 81, 91) are open are in registry and that the directions of polarization ( $E_1$ ,  $E_2$ ,  $E_3$ ,  $E_4$ ,  $E_5$ ) in those substrates are opposite to each other, said recording head further including an ink supply means (10) that is provided on the side opposite to the side where said orifice is to be provided.
2. An ink-jet recording head according to claim 1, said plurality of piezoelectric substrates comprising: a central substrate (1) that has said grooves (3,4) on both surfaces;
- two piezoelectric substrates (20, 30) each of which has, on one surface, grooves (21, 31);
- said two substrates (20, 30) being fixed to said central substrate (1) to form a unitary assembly in such a way that the surfaces of those substrates where

the grooves are open are aligned with those surfaces of the central substrate where the grooves are open and that the directions ( $E_2$ ,  $E_3$ ) of polarization in said two substrates (20, 30) are opposite to the direction of polarization ( $E_1$ ) in the central substrate (1).

3. An ink-jet recording head according to claim 2, wherein the grooves (3) formed in one surface of said central substrate (1) are offset from the grooves (4) in the other surface by one half of the pitch between adjacent grooves.
4. An ink-jet recording head comprising:
  - a substrate unit (142) that is composed of a first and a second polarized piezoelectric substrate (140, 141) that are bonded together in such a way that the directions of polarization are opposite to each other, said substrate unit having a plurality of grooves (143) formed therein that are spaced by diaphragms (146) at a predetermined pitch and electrodes (147) that are formed in those grooves (143) in an electrically isolated manner, each of said grooves (143) comprising a portion (143b) that extends from the surface of the first piezoelectric substrate (141) to partial thickness of the second piezoelectric substrate (140) and that has a sufficient depth to form an ink reservoir, a portion (143a) communicating with one side of the first piezoelectric substrate (141) and having a sufficient depth to provide a nozzle orifice that is adapted to squirt ink drops, and a portion (143c) having a depth appropriate for receiving an externally supplied ink; a top cover (150) that seals the surface of said substrate unit where the grooves are open; and a member (151) for supplying ink into said grooves.
5. An ink-jet recording head according to claim 4, wherein said first piezoelectric substrate (141) has a thickness approximately one half the depth of the ink reservoir portion.
6. An ink-jet recording head comprising:
  - a substrate unit that is composed of a first (201), a second (200) and a third (202) polarized piezoelectric substrate that are bonded together in such a way that the directions of polarization are opposite to each other, said substrate unit having a plurality of grooves (203, 204) formed therein that are spaced by diaphragms at a predetermined pitch and electrodes that are formed in those grooves in an electrically isolated manner, each of said grooves comprising a portion that extends from the surface of the outer first (201) and third (202) piezoelectric substrates to a partial thickness of the centrally fixed second piezoelectric substrate (200) that has a sufficient depth to form an ink reservoir, a portion communicating with one side of the first piezoelectric substrate and having a sufficient depth to

provide a nozzle orifice that is adapted to squirt ink drops, and a portion having a depth appropriate for receiving an externally supplied ink; two covers (205, 206) that seal the opposite surfaces of said substrate unit where the grooves are open; and a member (207, 208) for supplying ink into said grooves.

7. An ink-jet recording head according to claim 6, wherein said first (201) and third (202) piezoelectric substrates have a thickness approximately one half the depth of the ink reservoir portion.
8. An ink jet recording head according to claim 6 or 7, wherein the grooves formed in one surface of said second substrate are offset from the grooves in the other surface by one half of the pitch between adjacent grooves.
9. An ink-jet recording head comprising:
  - a substrate unit that is composed of a first (171) and a second (170) polarized piezoelectric substrate that are bonded together in such a way that the directions of polarization are opposite to each other, said substrate unit having a plurality of grooves (173) formed therein that are spaced by diaphragms at a predetermined pitch and electrodes that are formed in those grooves in an electrically isolated manner, each of said grooves (137) extending from the surface of the first (171) piezoelectric substrate to a partial thickness of the second (170) piezoelectric substrate and having a sufficient depth to form an ink reservoir, said grooves being sealed at both ends; a top cover (180) that is fixed to the surface of said substrate unit where the grooves (180a) are open and that has grooves communicating with the grooves in said substrate unit to form nozzle orifices (181); and a member (182) for supplying ink into said grooves.
10. An ink-jet recording head according to claim 9, wherein said first piezoelectric substrate (171) has a thickness approximately one half the depth of the ink reservoir portion.
11. An ink-jet recording head according to claim 9 or 10 further comprising:
  - a third polarized piezoelectric substrate that is bonded to said substrate unit in such a way that the directions of polarization are opposite to each other, and wherein two covers are fixed to the opposite surfaces of said substrate unit where the grooves are open and that have grooves communicating with the grooves in said substrate unit to form nozzle orifices;

12. An ink-jet recording head according to claim 11 wherein said first and third piezoelectric substrates have a thickness approximately one half the depth of the ink reservoir portion.
13. An ink-jet recording head according to one of the preceding claims; wherein each of said electrodes is divided into at least two regions (84, 85; 94, 95) in the longitudinal direction of the grooves (81; 91).
14. An ink-jet recording head according to one of the preceding claims wherein each of said electrodes (112, 122, 123) is formed in such a way that it is thin in the region closer to the nozzle orifice side and thick in the region closer to the ink supply side.
15. An ink-jet recording head according to one of the preceding claims, wherein said grooves (111, 130) are formed to be shallow (130b) in the region closer to the ink supply side so that the diaphragms (133) in the region closer to the nozzle orifice side will have a smaller elastic modulus.
16. Use of the ink-jet recording head according to any of the preceding claims in a printing apparatus.
17. A printing apparatus comprising an ink-jet recording head according to one of claims 1 to 15, a head carriage (303) for mounting said ink-jet recording head, head carriage driving means (304, 307) for driving said head carriage in a scanning direction, and a platen (308) on which a recording paper (309) is disposed.

#### Patentansprüche

1. Tintenstrahlaufzeichnungskopf mit:  
einer Mehrzahl piezoelektrischer Substrate (1, 20, 30, 80, 90), die in Richtung ihrer Dicke polarisiert sind und Rinnen (3, 4, 21, 31, 81, 91, 111) aufweisen, die durch Diaphragmen (5, 6, 22, 32, 82, 92, 133) um einen bestimmten Abstand beabstandet sind; und  
Elektroden (17, 18, 24, 34, 84, 85, 94, 95, 112, 122, 123), die in diesen Rinnen in elektrisch isolierter Weise ausgebildet sind,  
wobei jede der Rinnen (3, 4, 21, 31, 81, 91, 111) einen Bereich mit einer zur Ausbildung eines Tintenreservoirs ausreichenden Tiefe, einen Bereich, welcher mit einer Seite (1a, 80a, 90a) des Kopfs in Verbindung steht und eine ausreichende Tiefe zur Bereitstellung einer Düsenöffnung (50, 51) aufweist, welche auf das Ausstoßen von Tintentropfen ausgerichtet ist, und einen Bereich mit einer zur Aufnahme extern zugeführter Tinte geeigneten Tiefe aufweist,  
wobei die piezoelektrischen Substrate (1, 20, 30, 80, 90) so zur Bildung einer Einheitsanordnung aneinander befestigt sind, daß die Oberflächen der

Substrate, an denen diese Rinnen (3, 21, 4, 31, 81, 91) offen sind, in Deckung sind, und daß die Polarisationsrichtungen ( $E_1$ ,  $E_2$ ,  $E_3$ ,  $E_4$ ,  $E_5$ ) in diesen Substraten entgegengesetzt sind, wobei der Aufzeichnungskopf des weiteren ein Tintenzufuhrmittel (10) aufweist, welches auf der Seite bereitgestellt ist, welche der Seite, auf welcher die Öffnung zur Verfügung gestellt ist, entgegengesetzt ist.

2. Tintenstrahlaufzeichnungskopf gemäß Anspruch 1, wobei die Mehrzahl piezoelektrischer Substrate folgendes aufweist:  
ein mittleres Substrat (1), das auf beiden Oberflächen die Rinnen (3, 4) aufweist;  
zwei piezoelektrische Substrate (20, 30), von denen jedes auf einer Oberfläche Rinnen (21, 31) aufweist;  
wobei die beiden Substrate (20, 30) so zur Bildung einer Einheitsanordnung an dem mittleren Substrat (1) befestigt sind, daß die Oberflächen der Substrate, an denen die Rinnen offen sind, mit den Oberflächen des mittleren Substrats, an denen die Rinnen offen sind, ausgerichtet sind, und daß die Polarisationsrichtungen ( $E_2$ ,  $E_3$ ) in den beiden Substraten (20, 30) der Polarisationsrichtung ( $E_1$ ) in dem mittleren Substrat (1) entgegengesetzt sind.
3. Tintenstrahlaufzeichnungskopf gemäß Anspruch 2, bei dem die in einer Oberfläche des mittleren Substrats (1) ausgebildeten Rinnen (3) von den in der anderen Oberfläche ausgebildeten Rinnen (4) um einen halben Abstand zwischen benachbarten Rinnen versetzt sind.
4. Tintenstrahlaufzeichnungskopf mit:  
einer Substrateinheit (142), die sich aus einem ersten und einem zweiten polarisierten piezoelektrischen Substrat (140, 141) zusammensetzt, die so miteinander verbunden sind, daß die Polarisationsrichtungen entgegengesetzt sind, wobei die Substrateinheit eine Mehrzahl darin ausgebildeter Rinnen (143), welche durch Diaphragmen (146) um einen bestimmten Abstand beabstandet sind, und Elektroden (147), die in diesen Rinnen (143) in elektrisch isolierter Weise ausgebildet sind, aufweist, wobei jede der Rinnen (143) einen Bereich (143b), welcher sich von der Oberfläche des ersten piezoelektrischen Substrats (141) zur teilweisen Dicke des zweiten piezoelektrischen Substrats (140) erstreckt und eine zur Ausbildung eines Tintenreservoirs ausreichende Tiefe aufweist, einen Bereich (143a), welcher mit einer Seite des ersten piezoelektrischen Substrats (141) in Verbindung steht und eine ausreichende Tiefe zur Bereitstellung einer Düsenöffnung aufweist, welche auf das Ausstoßen von Tintentropfen ausgerichtet ist, und einen Bereich (143c) mit einer zur Aufnahme extern zugeführter Tinte geeigneten Tiefe aufweist;  
einer oberen Abdeckung (150), die die Oberfläche

der Substrateinheit, an der die Rinnen offen sind, verschließt; und einem Element (151) zur Zufuhr von Tinte in die Rinnen.

5. Tintenstrahlaufzeichnungskopf gemäß Anspruch 4, bei dem das erste piezoelektrische Substrat (141) eine Dicke von ungefähr der Hälfte der Tiefe des Tintenreservoirbereichs aufweist.

6. Tintenstrahlaufzeichnungskopf mit:  
einer Substrateinheit, die sich aus einem ersten (201), einem zweiten (200) und einem dritten (202) polarisierten piezoelektrischen Substrat zusammensetzt, die so miteinander verbunden sind, daß die Polarisationsrichtungen entgegengesetzt sind, wobei die Substrateinheit eine Mehrzahl darin ausgebildeter Rinnen (203, 204), welche durch Diaphragmen um einen bestimmten Abstand beabstandet sind, und Elektroden, die in diesen Rinnen in elektrisch isolierter Weise ausgebildet sind, aufweist, wobei jede der Rinnen einen Bereich, welcher sich von der Oberfläche des äußeren ersten (201) und dritten (202) piezoelektrischen Substrats zur teilweisen Dicke des zentral befestigten zweiten piezoelektrischen Substrats (200) erstreckt und eine zur Ausbildung eines Tintenreservoirs ausreichende Tiefe aufweist, einen Bereich, welcher mit einer Seite des ersten piezoelektrischen Substrats in Verbindung steht und eine ausreichende Tiefe zur Bereitstellung einer Düsenöffnung aufweist, welche auf das Ausstoßen von Tintentropfen ausgerichtet ist, und einen Bereich mit einer zur Aufnahme extern zugeführter Tinte geeigneten Tiefe aufweist;  
zwei Abdeckungen (205, 206), die die gegenüberliegenden Oberflächen der Substrateinheit, an denen die Rinnen offen sind, verschließen; und einem Element (207, 208) zur Zufuhr von Tinte in die Rinnen.

7. Tintenstrahlaufzeichnungskopf gemäß Anspruch 6, bei dem das erste (201) und das dritte (202) piezoelektrische Substrat eine Dicke von ungefähr der Hälfte der Tiefe des Tintenreservoirbereichs aufweisen.

8. Tintenstrahlaufzeichnungskopf gemäß Anspruch 6 oder 7, bei dem die in einer Oberfläche des zweiten Substrats ausgebildeten Rinnen von den Rinnen in der anderen Oberfläche um einen halben Abstand zwischen benachbarten Rinnen versetzt sind.

9. Tintenstrahlaufzeichnungskopf mit:  
einer Substrateinheit, die sich aus einem ersten (171) und einem zweiten (170) polarisierten piezoelektrischen Substrat zusammensetzt, die so miteinander verbunden sind, daß die Polarisationsrichtungen entgegengesetzt sind,

wobei die Substrateinheit eine Mehrzahl darin ausgebildeter Rinnen (173), welche durch Diaphragmen um einen bestimmten Abstand beabstandet sind, und Elektroden, die in diesen Rinnen in elektrisch isolierter Weise ausgebildet sind, aufweist, wobei sich jede der Rinnen (137) von der Oberfläche des ersten (171) piezoelektrischen Substrats zur teilweisen Dicke des zweiten (170) piezoelektrischen Substrats erstreckt und eine zur Ausbildung eines Tintenreservoirs ausreichende Tiefe aufweist, wobei die Rinnen an beiden Enden verschlossen sind;  
einer oberen Abdeckung (180), die an der Oberfläche der Substrateinheit, an der die Rinnen (180a) offen sind, befestigt ist, und die mit den Rinnen in der Substrateinheit verbundene Rinnen aufweist, um Düsenöffnungen (181) zu bilden; und einem Element (182) zur Zufuhr von Tinte in die Rinnen.

10. Tintenstrahlaufzeichnungskopf gemäß Anspruch 9, bei dem das erste piezoelektrische Substrat (171) eine Dicke von ungefähr der Hälfte der Tiefe des Tintenreservoirbereichs aufweist.

11. Tintenstrahlaufzeichnungskopf gemäß Anspruch 9 oder 10, der des weiteren folgendes aufweist:  
ein drittes polarisiertes piezoelektrisches Substrat, das so mit der Substrateinheit verbunden ist, daß die Polarisationsrichtungen entgegengesetzt sind, und wobei zwei Abdeckungen an den gegenüberliegenden Oberflächen der Substrateinheit, an denen die Rinnen offen sind, befestigt sind, und Rinnen in Verbindung mit den Rinnen in der Substrateinheit aufweisen, um Düsenöffnungen zu bilden;

12. Tintenstrahlaufzeichnungskopf gemäß Anspruch 11, bei dem das erste und das dritte piezoelektrische Substrat eine Dicke von ungefähr der Hälfte der Tiefe des Tintenreservoirbereichs aufweisen.

13. Tintenstrahlaufzeichnungskopf gemäß einem der vorhergehenden Ansprüche, bei dem jede der Elektroden in Längsrichtung der Rinnen (81; 91) in mindestens zwei Bereiche (84, 85; 94, 95) geteilt ist.

14. Tintenstrahlaufzeichnungskopf gemäß einem der vorhergehenden Ansprüche, bei dem jede der Elektroden (112, 122, 123) so ausgebildet ist, daß sie in dem Bereich, welcher näher an der Düsenöffnungsseite liegt, dünn ist, und in dem Bereich, welcher näher an der Tintenzufuhrseite liegt, dick ist.

15. Tintenstrahlaufzeichnungskopf gemäß einem der vorhergehenden Ansprüche, bei dem die Rinnen (111, 130) so ausgebildet sind, daß sie in dem Bereich, welcher näher an der Tintenzufuhrseite

liegt, flach (130b) sind, so daß die Diaphragmen (133) in dem Bereich, welcher näher an der Düsenöffnungsseite liegt, einen kleineren Elastizitätsmodul aufweisen.

16. Verwendung des Tintenstrahlaufzeichnungskopfs gemäß einem der vorhergehenden Ansprüche in einer Druckvorrichtung.

17. Druckvorrichtung mit einem Tintenstrahlaufzeichnungskopf gemäß einem der Ansprüche 1 bis 15, einem Kopfschlitten (303) zum Anbringen des Tintenstrahlaufzeichnungskopfs, Kopfschlittenantriebsmitteln (304, 307) zum Antrieb des Kopfschlittens in einer Abtastrichtung und einer Walze (308), auf welcher sich ein Aufzeichnungspapier (309) befindet.

#### Revendications

1. Tête d'enregistrement à jet d'encre comprenant :  
une pluralité de substrats piézoélectriques (1, 20, 30, 80, 90) qui sont polarisés dans la direction de leur épaisseur et qui comportent des cannelures (3, 4, 21, 31, 81, 91, 111) espacées par des membranes (5, 6, 22, 32, 82, 92, 133) à un pas prédéterminé ; et,

des électrodes (17, 18, 24, 34, 84, 85, 94, 95, 112, 122, 123) qui sont formées dans ces cannelures en étant isolées électriquement,

chacune desdites cannelures (3, 4, 21, 31, 81, 91, 111) comprenant une partie ayant une profondeur suffisante pour constituer un réservoir d'encre, une partie communiquant avec un côté (1a, 80a, 90a) de la tête et ayant une profondeur suffisante pour fournir un orifice d'ajutage (50, 51) qui est adapté pour faire jaillir des gouttes d'encre, et une partie ayant une profondeur appropriée pour recevoir une encre fournie par l'extérieur,

lesdits substrats piézoélectriques (1, 20, 30, 80, 90) étant fixés ensemble en un ensemble unitaire de manière telle que les surfaces des substrats où ces cannelures (3, 21, 4, 31, 81, 91) sont ouvertes sont en coïncidence et que les directions de polarisation ( $E_1$ ,  $E_2$ ,  $E_3$ ,  $E_4$ ,  $E_5$ ) sont opposées entre elles dans ces substrats, ladite tête d'enregistrement incluant en outre des moyens de fourniture d'encre (10) qui sont prévus du côté opposé au côté où doit être prévu ledit orifice.

2. Tête d'enregistrement à jet d'encre selon la revendication 1, dans laquelle ladite pluralité des substrats piézoélectriques comprend :

un substrat central (1) qui comporte lesdites cannelures (3, 4) sur les deux surfaces ;

deux substrats piézoélectriques (20, 30) dont chacun comporte des cannelures (21, 31) sur une surface ;

lesdits deux substrats (20, 30) étant fixés

audit substrat central (1) pour constituer un ensemble unitaire de manière telle que les surfaces de ces substrats où les cannelures sont ouvertes sont alignées avec les surfaces du substrat central où les cannelures sont ouvertes et que les directions ( $E_2$ ,  $E_3$ ) de polarisation dans lesdits deux substrats (20, 30) sont opposées à la direction de polarisation ( $E_1$ ) dans le substrat central (1).

3. Tête d'enregistrement à jet d'encre selon la revendication 2, dans laquelle les cannelures (3) formées dans une surface dudit substrat central (1) sont décalées des cannelures (4) dans l'autre surface d'une moitié du pas entre les cannelures adjacentes.

4. Tête d'enregistrement à jet d'encre comprenant :  
une unité de substrats (142) qui est composée d'un premier et d'un second substrat piézoélectrique polarisé (140, 141) qui sont liés ensemble de manière telle que les directions de polarisation sont opposées entre elles, ladite unité de substrats comportant une pluralité de cannelures (143) formées à l'intérieur de celle-ci qui sont espacées par des membranes (146) à un pas prédéterminé et des électrodes (147) qui sont formées dans ces cannelures (143) en étant isolées électriquement, chacune desdites cannelures (143) comprenant une partie (143b) qui s'étend de la surface du premier substrat piézoélectrique (141) jusqu'à une épaisseur partielle du second substrat piézoélectrique (140) et qui a une profondeur suffisante pour constituer un réservoir d'encre, une partie (143a) communiquant avec un côté du premier substrat piézoélectrique (141) et ayant une profondeur suffisante pour fournir un orifice d'ajutage qui est adapté pour faire jaillir des gouttes d'encre, et une partie (143c) ayant une profondeur appropriée pour recevoir une encre fournie par l'extérieur ;

un couvercle supérieur (150) qui ferme la surface de ladite unité de substrats où les cannelures sont ouvertes ; et,

un organe (151) pour fournir de l'encre dans lesdites cannelures.

5. Tête d'enregistrement à jet d'encre selon la revendication 4, dans laquelle ledit premier substrat piézoélectrique (141) a une épaisseur approximativement égale à la moitié de la profondeur de la partie de réservoir d'encre.

6. Tête d'enregistrement à jet d'encre comprenant :  
une unité de substrats qui est composée d'un premier (201), d'un deuxième (200) et d'un troisième (202) substrat piézoélectrique polarisé qui sont liés ensemble de manière telle que les directions de polarisation sont opposées entre elles, ladite unité de substrats comportant une pluralité de cannelures (203, 204) formées à l'intérieur

de celle-ci qui sont espacées par des membranes à un pas prédéterminé et des électrodes qui sont formées dans ces cannelures en étant isolées électriquement, chacune desdites cannelures comprenant une partie qui s'étend de la surface des premier (201) et troisième (202) substrats piézoélectriques extérieurs jusqu'à une épaisseur partielle du deuxième substrat piézoélectrique (200) fixé au centre qui a une profondeur suffisante pour constituer un réservoir d'encre, une partie communiquant avec un côté du premier substrat piézoélectrique et ayant une profondeur suffisante pour fournir un orifice d'ajutage qui est adapté pour faire jaillir des gouttes d'encre, et une partie ayant une profondeur appropriée pour recevoir une encre fournie par l'extérieur ;

deux couvercles (205, 206) qui ferment la surface opposée de ladite unité de substrats où les cannelures sont couvertes ; et,

un organe (207, 208) pour fournir de l'encre dans les cannelures.

7. Tête d'enregistrement à jet d'encre selon la revendication 6, dans laquelle lesdits premier (201) et troisième (202) substrats piézoélectriques ont une épaisseur approximativement égale à la moitié de la profondeur de la partie de réservoir d'encre.
8. Tête d'enregistrement à jet d'encre selon la revendication 6 ou 7, dans laquelle les cannelures formées dans une surface dudit deuxième substrat sont décalées des cannelures dans l'autre surface d'une moitié du pas entre les cannelures adjacentes.
9. Tête d'enregistrement à jet d'encre comprenant :  
une unité de substrats qui est composée d'un premier (171) et d'un second (170) substrat piézoélectrique polarisé qui sont liés ensemble de manière telle que les directions de polarisation sont opposées entre elles, ladite unité de substrats comportant une pluralité de cannelures (173) formées à l'intérieur de celle-ci qui sont espacées par des membranes à un pas prédéterminé et des électrodes qui sont formées dans ces cannelures en étant isolées électriquement, chacune desdites cannelures (173) s'étendant de la surface du premier substrat piézoélectrique (171) jusqu'à une épaisseur partielle du second substrat piézoélectrique (170) et ayant une profondeur suffisante pour constituer un réservoir d'encre, lesdites cannelures étant fermées aux deux extrémités ;  
un couvercle supérieur (180) qui est fixé à la surface de ladite unité de substrats où les cannelures (180a) sont ouvertes et qui comporte des cannelures communiquant avec les cannelures dans ladite unité de substrats pour constituer des orifices d'ajutage (181) ; et,

un organe (182) pour fournir de l'encre dans lesdites cannelures.

10. Tête d'enregistrement à jet d'encre selon la revendication 9, dans laquelle ledit premier substrat piézoélectrique (171) a une épaisseur approximativement égale à la moitié de la profondeur de la partie de réservoir d'encre.
11. Tête d'enregistrement à jet d'encre selon la revendication 9 ou 10, comprenant en outre :  
un troisième substrat piézoélectrique polarisé qui est lié à ladite unité de substrats de manière telle que les directions de polarisation sont opposées entre elles,  
et dans laquelle deux couvercles sont fixés aux surfaces opposées de ladite unité de substrats où les cannelures sont ouvertes et qui comportent des cannelures communiquant avec les cannelures dans ladite unité de substrats pour constituer des orifices d'ajutage.
12. Tête d'enregistrement à jet d'encre selon la revendication 11, dans laquelle lesdits premier et troisième substrats piézoélectriques ont une épaisseur approximativement égale à la moitié de la profondeur de la partie de réservoir d'encre.
13. Tête d'enregistrement à jet d'encre selon l'une quelconque des revendications précédentes, dans laquelle chacune desdites électrodes est divisée en au moins deux régions (84, 85 ; 94, 95) dans la direction longitudinale des cannelures (81 ; 91).
14. Tête d'enregistrement à jet d'encre selon l'une quelconque des revendications précédentes, dans laquelle chacune desdites électrodes (112, 122, 123) est formée de manière telle qu'elle est mince dans la région la plus proche du côté de l'orifice d'ajutage et épaisse dans la région la plus proche du côté de fourniture d'encre.
15. Tête d'enregistrement à jet d'encre selon l'une quelconque des revendications précédentes, dans laquelle lesdites cannelures (111, 130) sont formées pour qu'elles soient peu profondes (130b) dans la région la plus proche du côté de fourniture d'encre afin que les membranes (133) dans la région la plus proche du côté de l'orifice d'ajutage aient un plus petit coefficient d'élasticité.
16. Utilisation de la tête d'enregistrement à jet d'encre selon l'une quelconque des revendications précédentes dans une imprimante.
17. Imprimante comprenant une tête d'enregistrement à jet d'encre selon l'une quelconque des revendications 1 à 15, un chariot de tête (303) pour monter ladite tête d'enregistrement à jet d'encre, des

moyens d'entraînement de chariot de tête (304, 307) pour entraîner ledit chariot de tête dans une direction de balayage, et une platine (308) sur laquelle est disposé du papier d'enregistrement (309).

5

10

15

20

25

30

35

40

45

50

55

FIG. 1

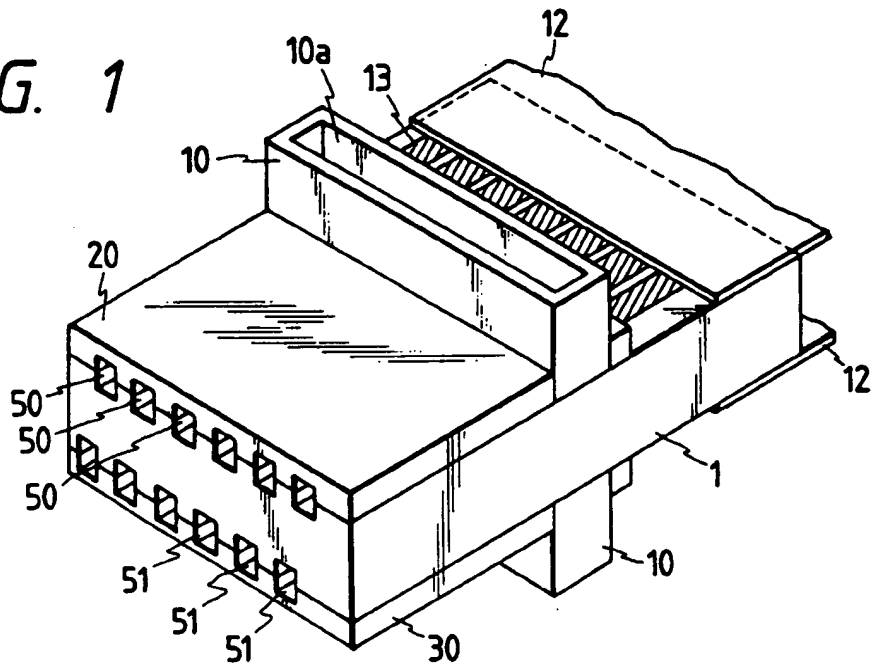


FIG. 2

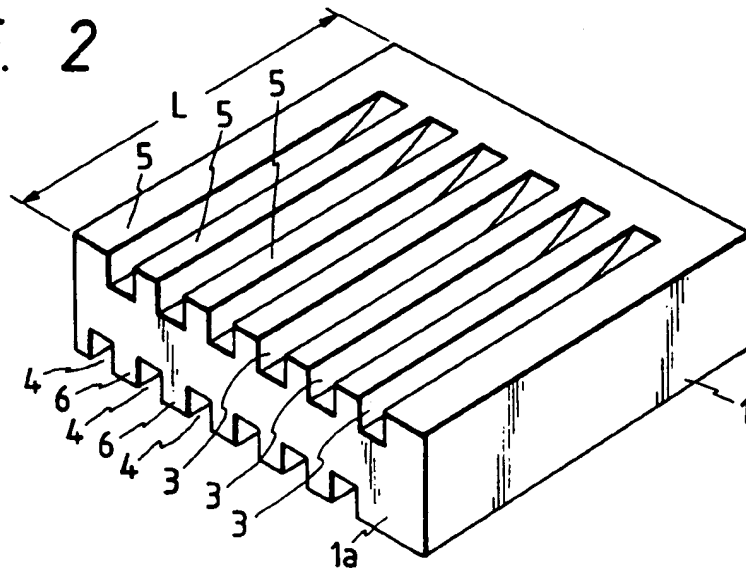


FIG. 3

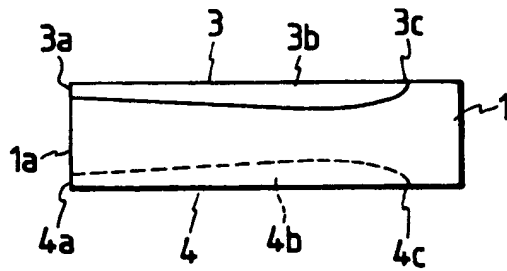




FIG. 4

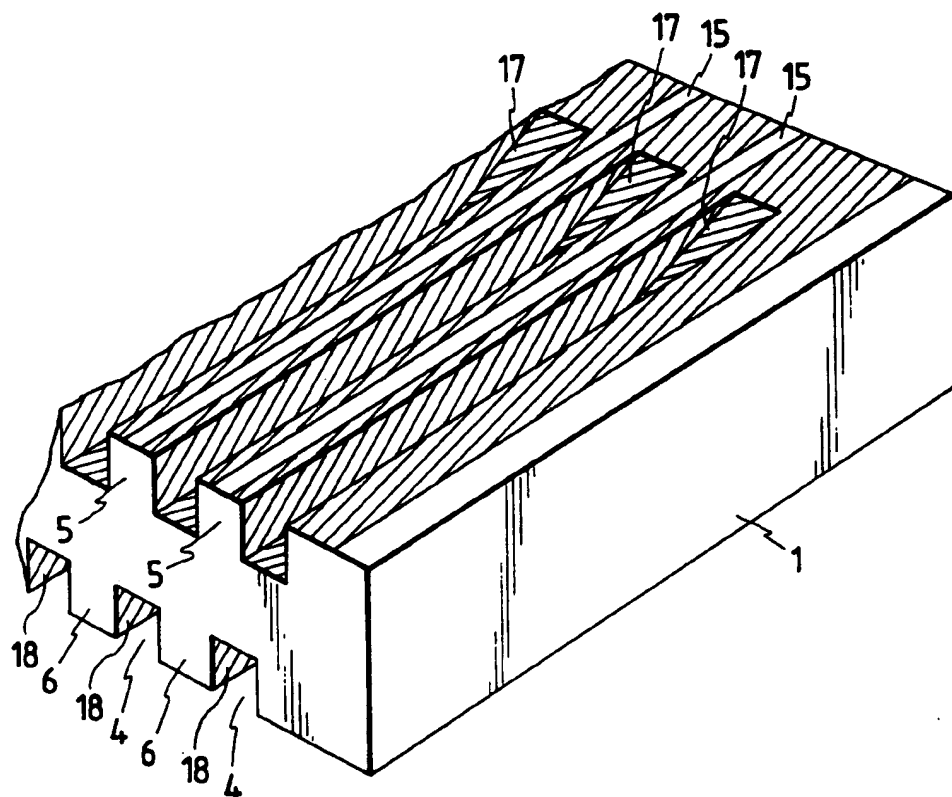


FIG. 5

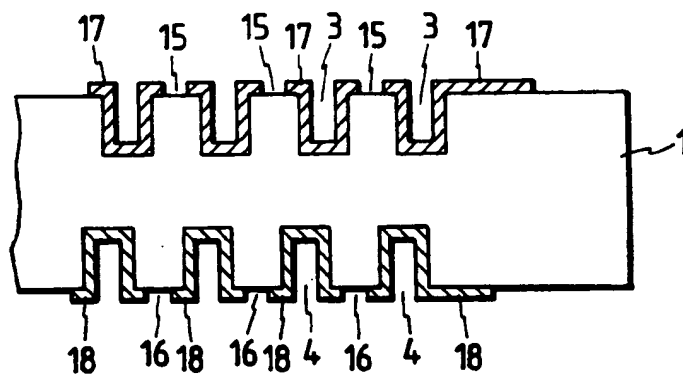


FIG. 6

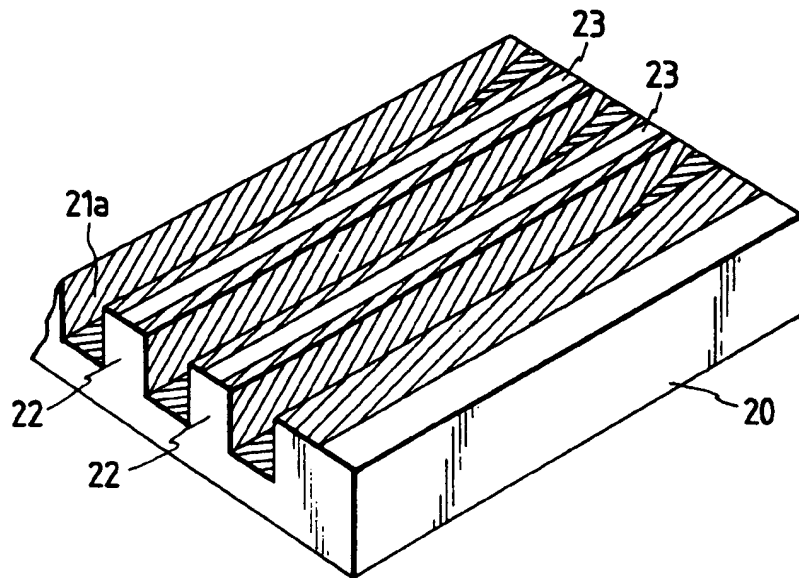


FIG. 7

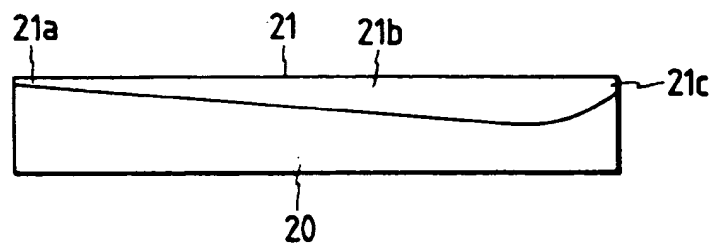


FIG. 8

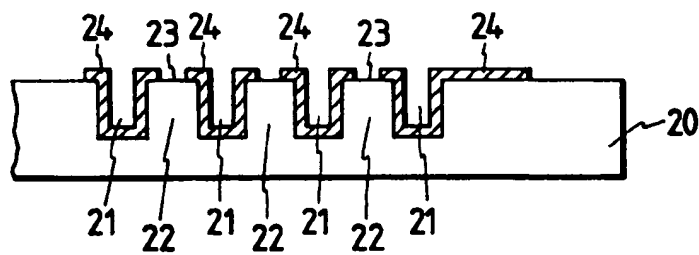


FIG. 9

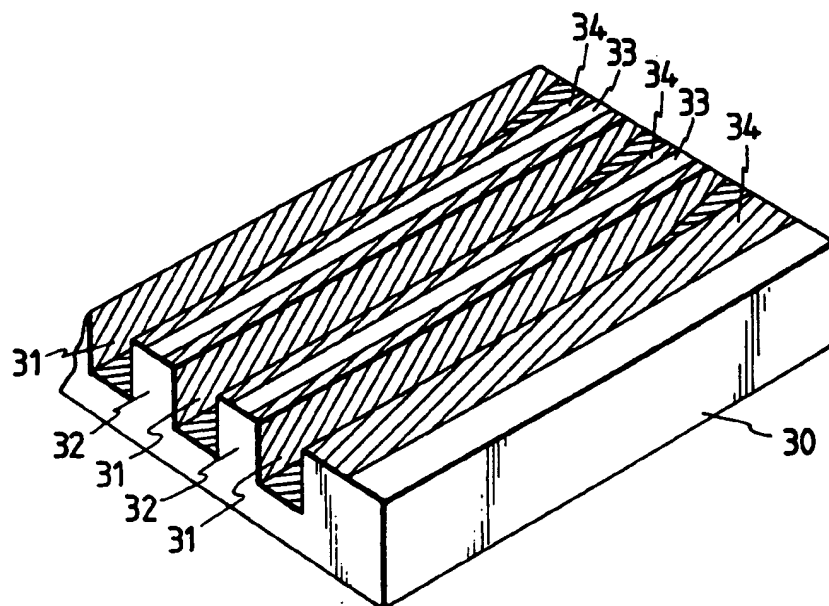


FIG. 10

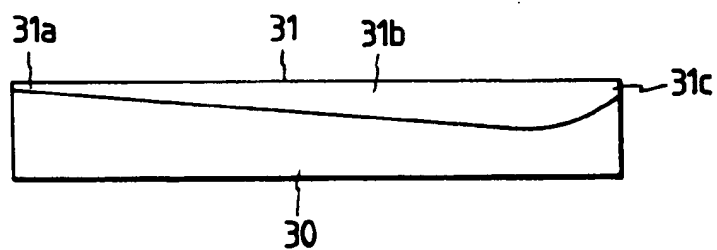


FIG. 11

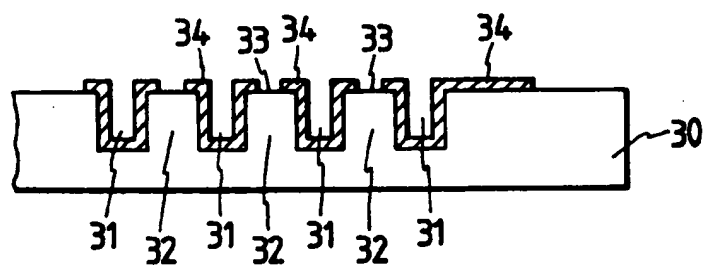


FIG. 12A

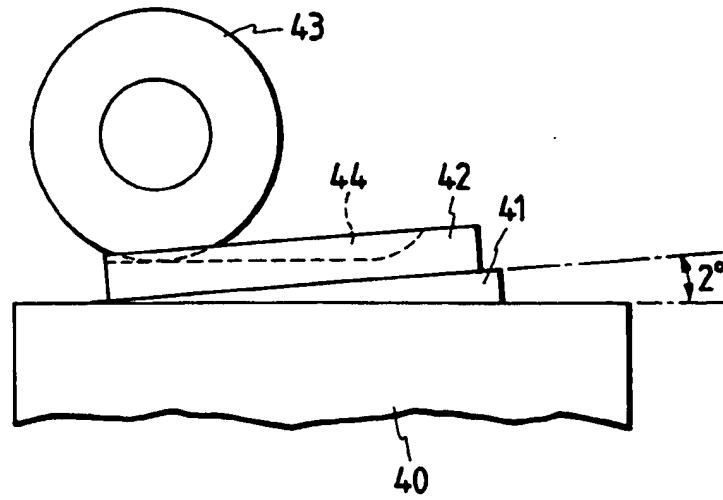


FIG. 12B

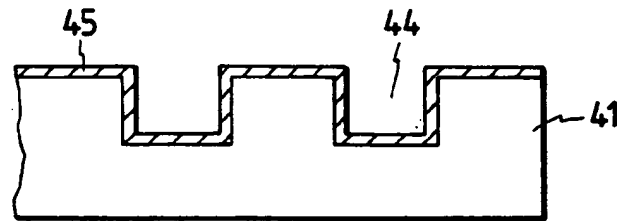


FIG. 12C

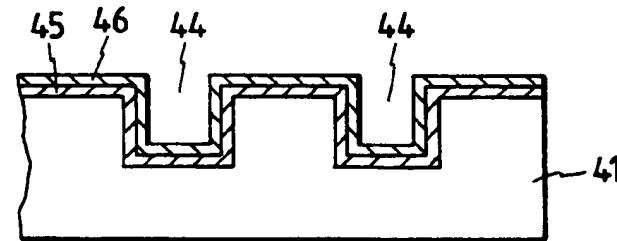


FIG. 12D

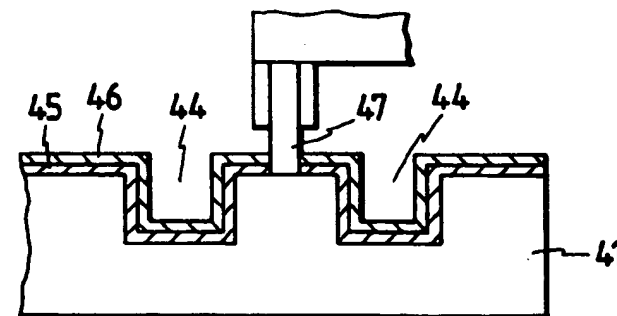


FIG. 13

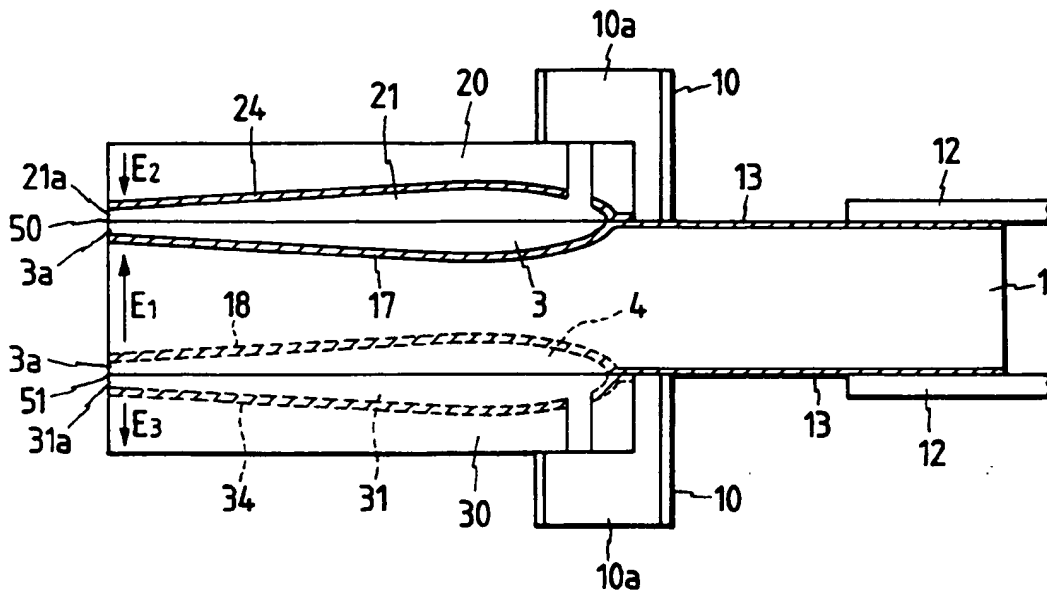


FIG. 14

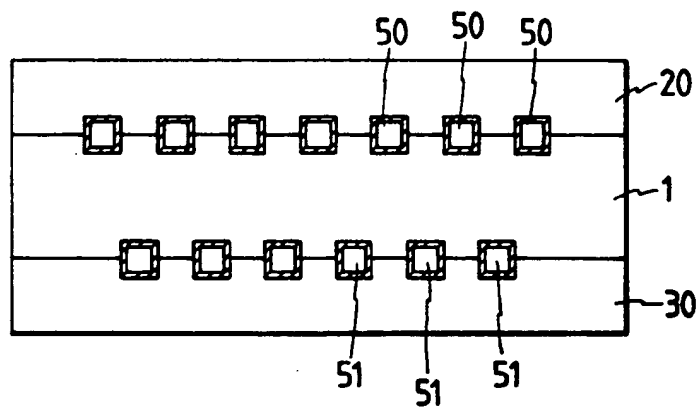


FIG. 15

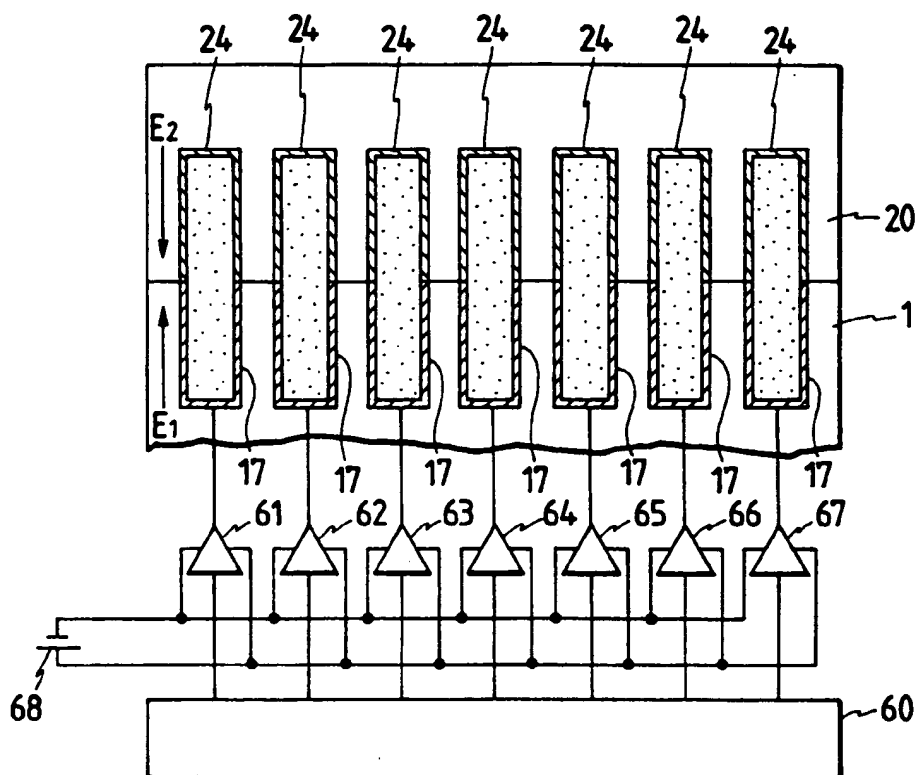


FIG. 16

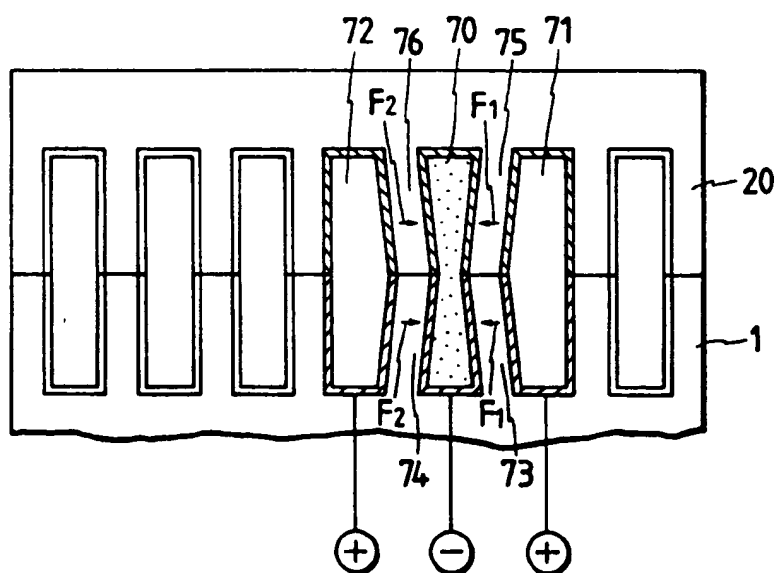


FIG. 17

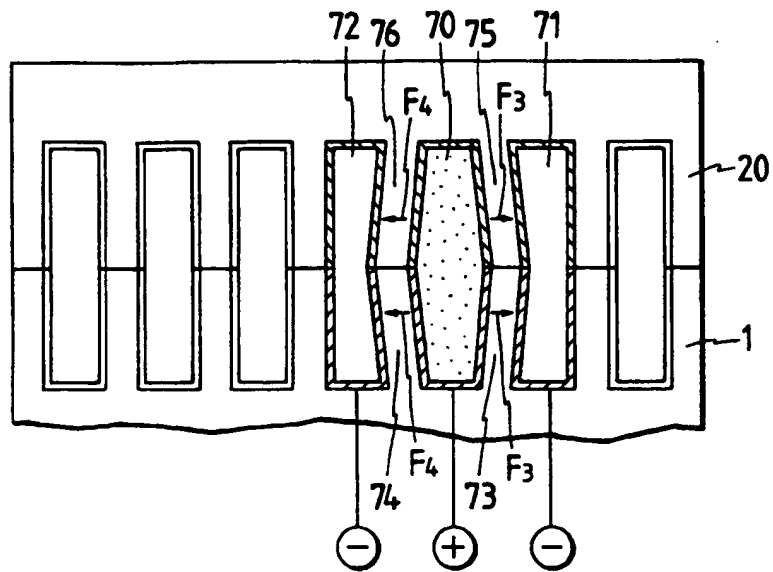


FIG. 19

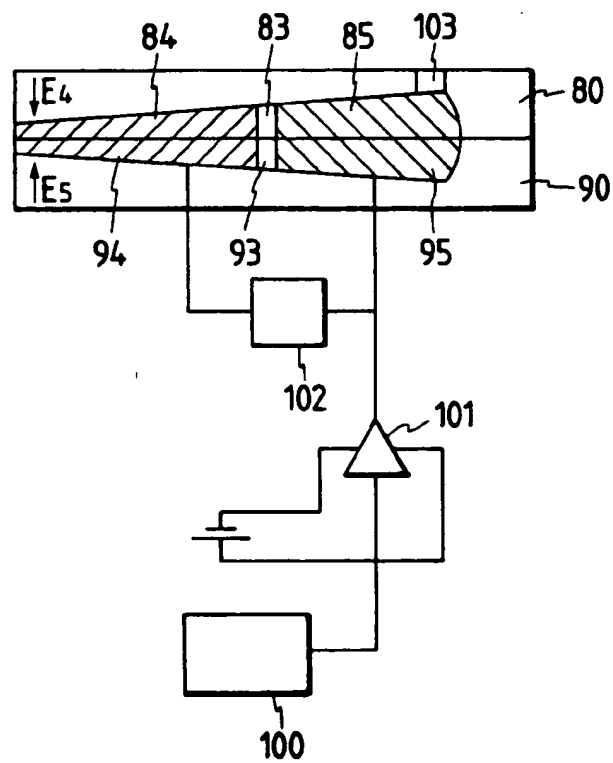


FIG. 18A

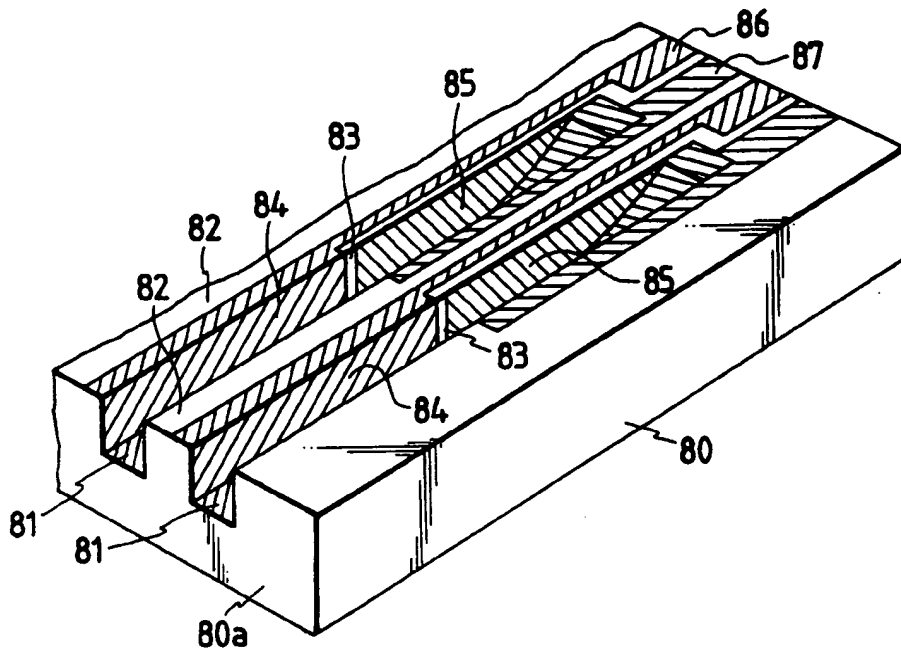


FIG. 18B

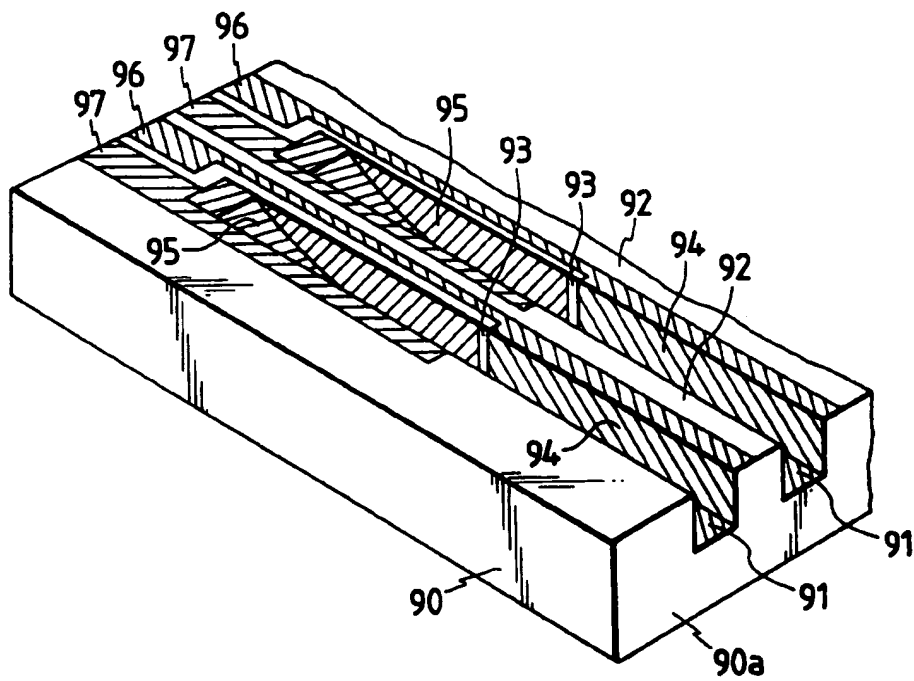




FIG. 20A

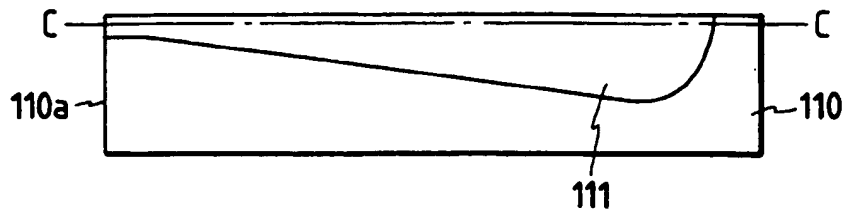


FIG. 20B

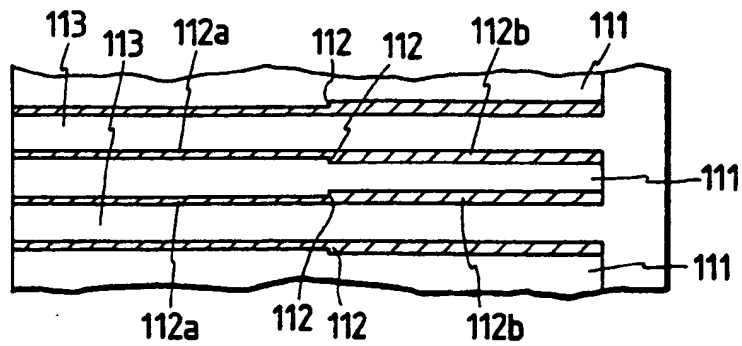


FIG. 21A

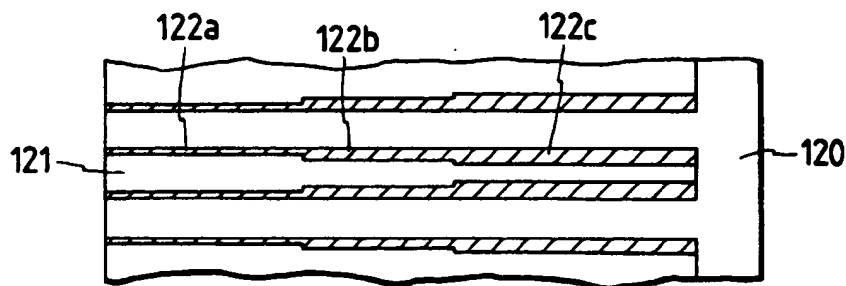


FIG. 21B

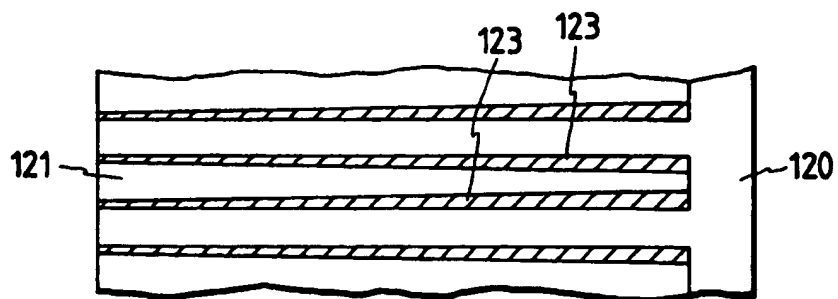


FIG. 22A

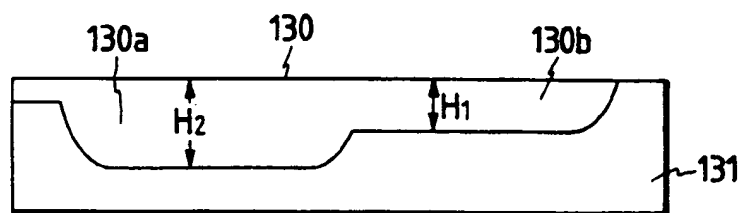


FIG. 22B

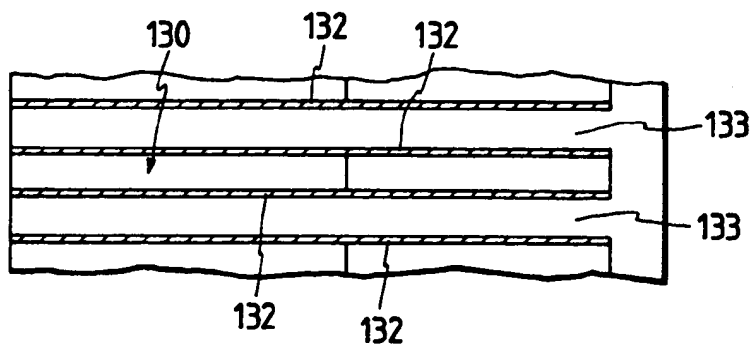


FIG. 23A

PRESSURE

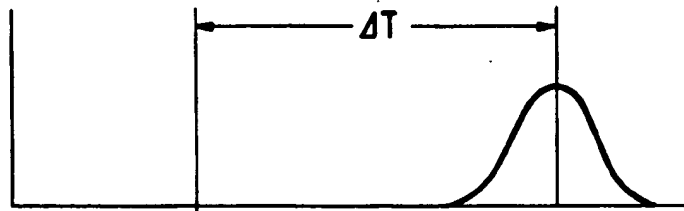


FIG. 23B

PRESSURE

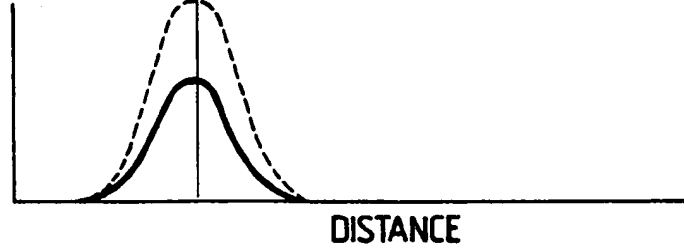


FIG. 23C




FIG. 24A

PRESSURE

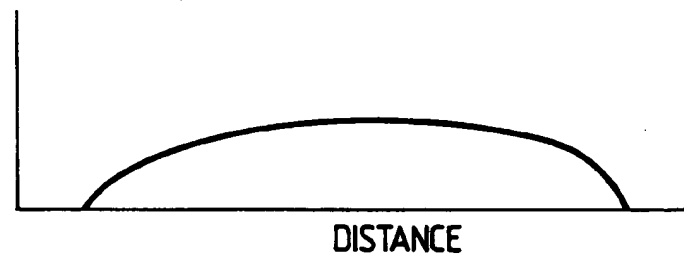


FIG. 24B




FIG. 25

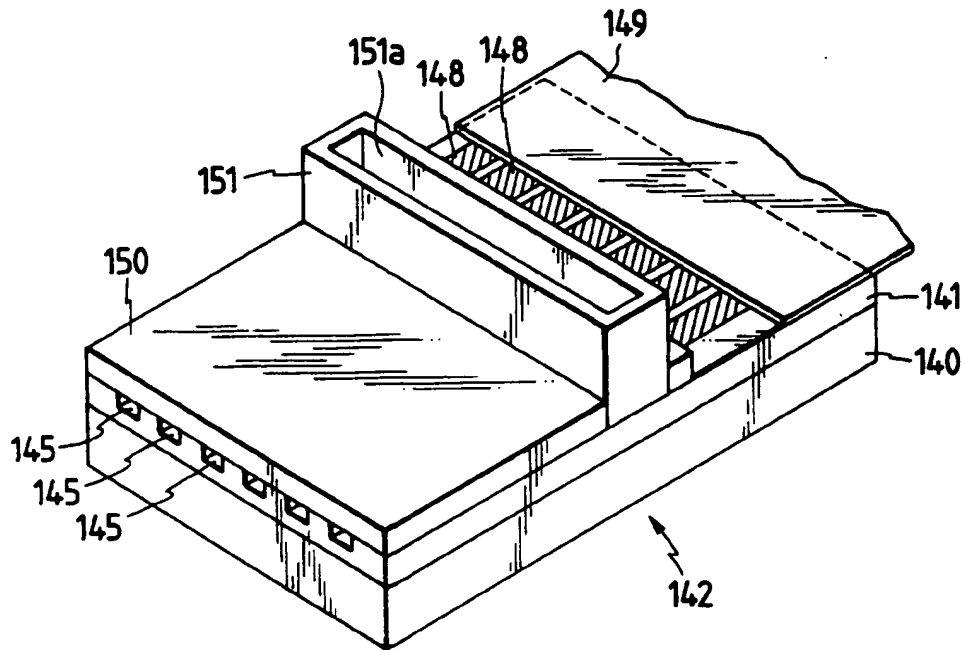


FIG. 26

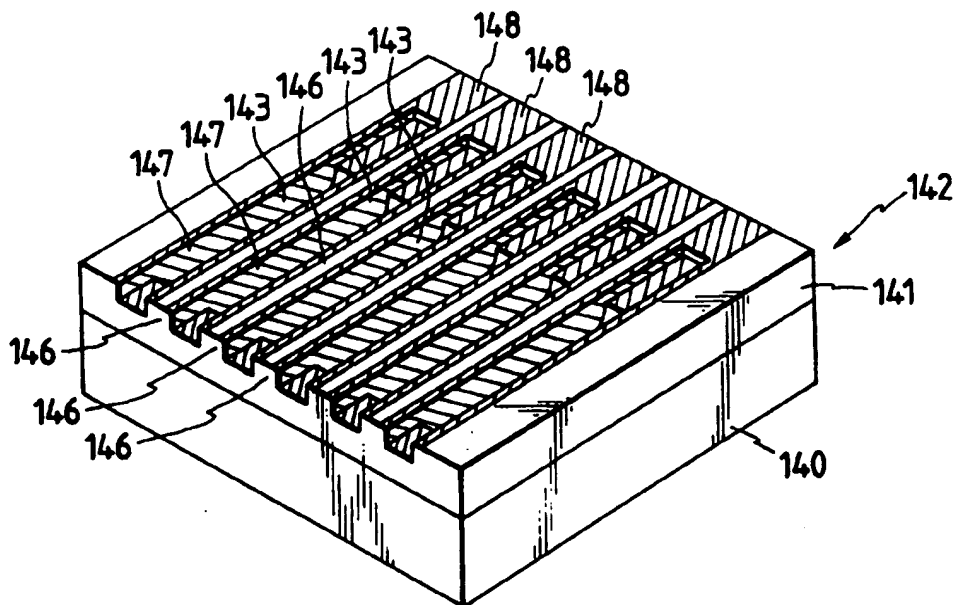


FIG. 27

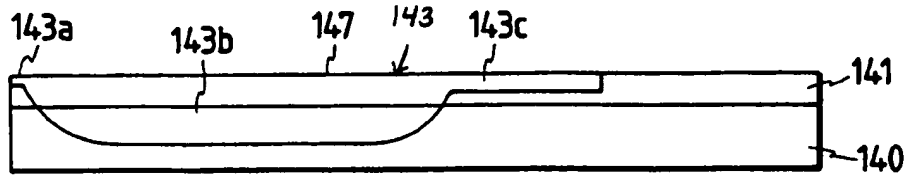


FIG. 28A

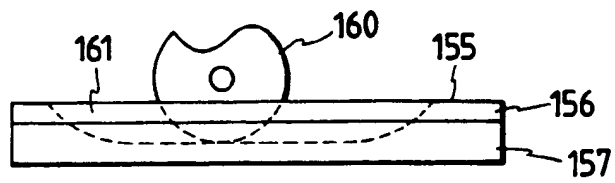


FIG. 28B

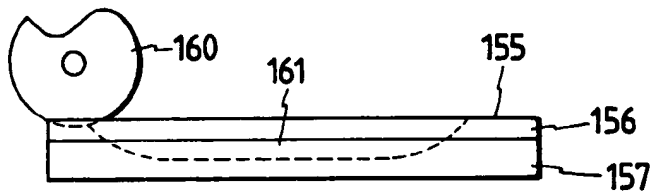


FIG. 28C

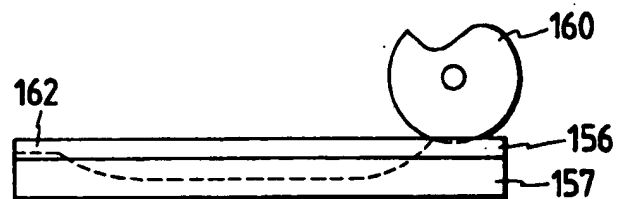


FIG. 29

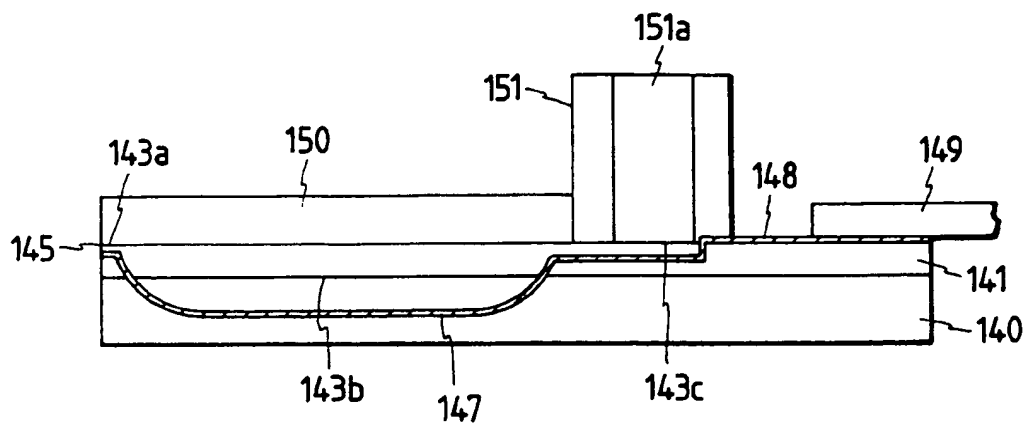


FIG. 30

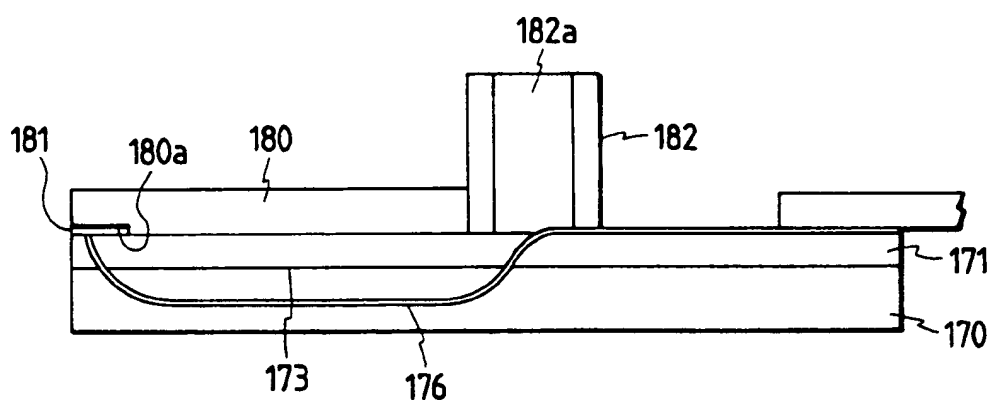


FIG. 31

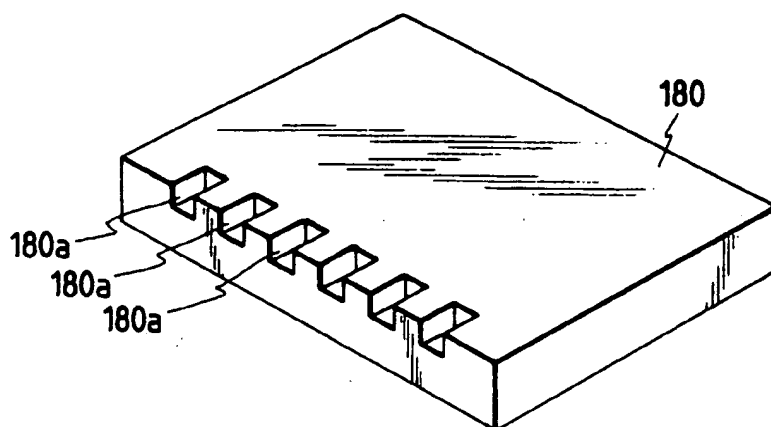


FIG. 32

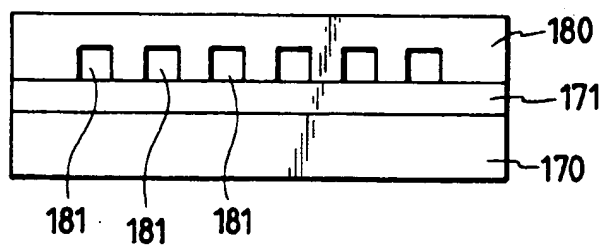


FIG. 33

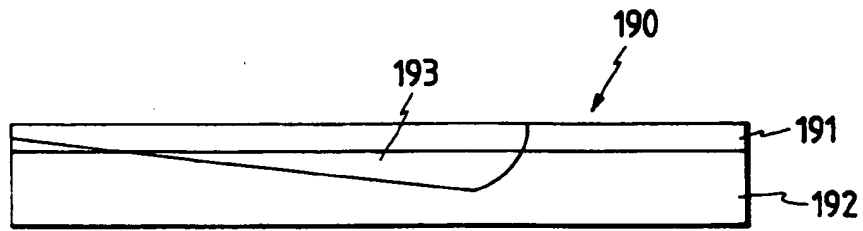


FIG. 34


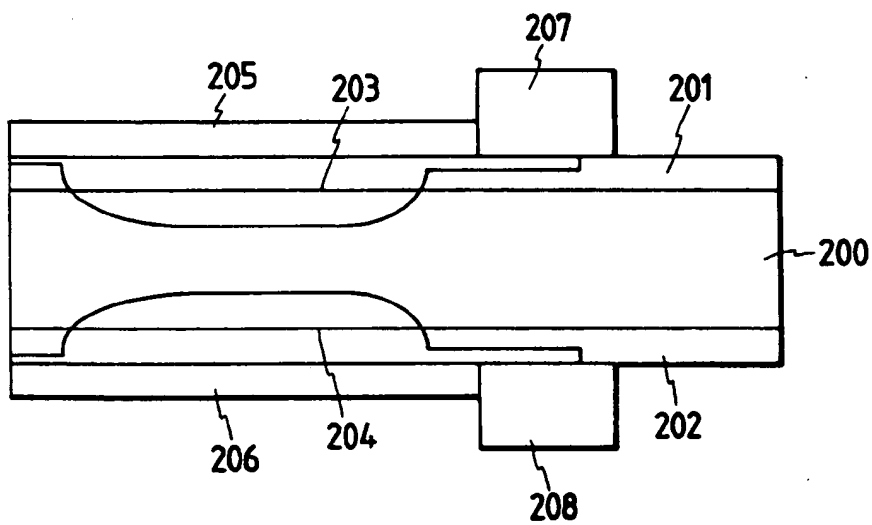




FIG. 35

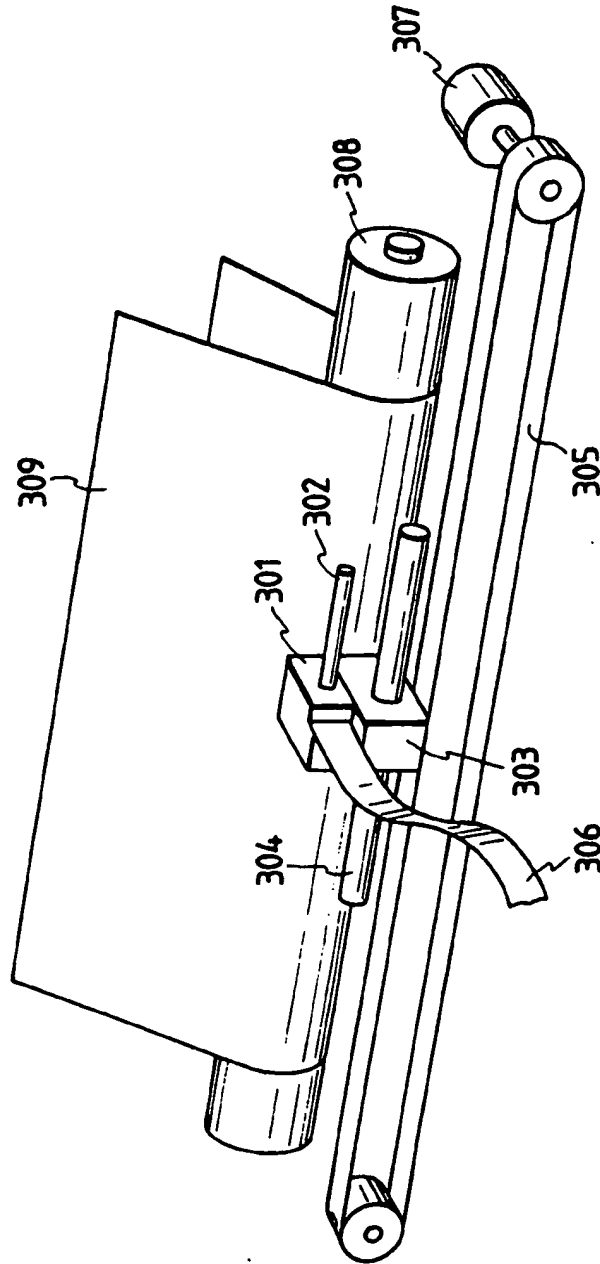

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☒ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**